




Pressure vessels and accessories




PARK RESIDENTIAL PRESSURE VESSELS WITH BASE

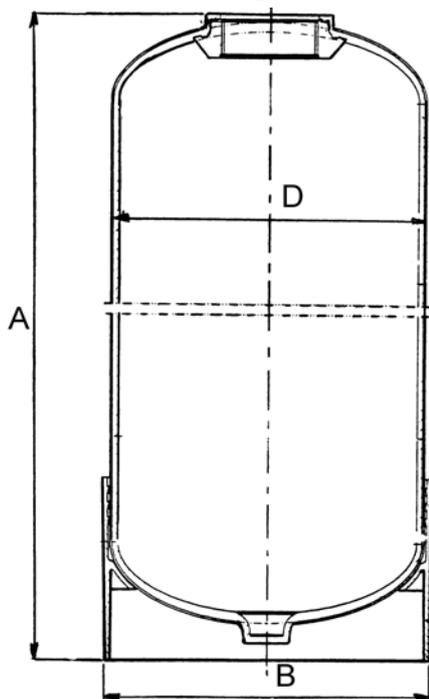

- composite pressure vessels PE liner reinforced with fiberglass and epoxy resin;
- for industrial and potable water treatment systems;
- European 97/23/EC Directive compliant for pressure equipment (PED);
- certification for contact with drinking water following EC directives and KTW recommendations;
- D.M. n.174 dated 06/04/2004 compliant about materials suitable for contact with water for human consumption;
- max operating pressure 10 bar;
- max operating temperature 50°C;
- top connection threaded 2 ½" – 8NPSM or 4" – 8UN;
- cycle test 250.000 times from 0,7 to 10 bar;
- burst test to 4 times max operating pressure;
- blue colour;
- warranty 5 years.

REF.	MODEL	VOLUME (liters)	DIAMETER (mm)	A (mm)	B (mm)	CONNECTION
B06013BB	6 x 13	4,6	159	342 ± 2	170	2 ½"
B06018BB	6 x 18	6,9	159	475 ± 2	170	2 ½"
B06035BB	6 x 35	14,4	159	907 ± 2	170	2 ½"
B07013BB	7 x 13	6,3	184	341 ± 2	195	2 ½"
B07017BB	7 x 17	8,8	184	446 ± 2	195	2 ½"
B07024BB	7 x 24	13,5	184	613 ± 2	195	2 ½"
B07030BB	7 x 30	16,8	184	778 ± 2	195	2 ½"
B07035BB	7 x 35	20,4	184	901 ± 2	195	2 ½"
B08013BB	8 x 13	8,2	208	347 ± 2	220	2 ½"
B08017BB	8 x 17	11,0	208	435 ± 2	220	2 ½"
B08024BB	8 x 24	16,6	208	612 ± 4	220	2 ½"
B08030BB	8 x 30	22,0	208	783 ± 2	220	2 ½"
B08035BB	8 x 35	25,7	208	902 ± 2	220	2 ½"
B08044BB	8 x 44	33,6	208	1124 ± 2	220	2 ½"
B09017BB	9 x 17	13,7	233	431 ± 4	240	2 ½"
B09024BB	9 x 24	20,4	233	612 ± 4	240	2 ½"
B09030BB	9 x 30	26,6	233	766 ± 5	240	2 ½"
B09035BB	9 x 35	31,3	233	903 ± 2	240	2 ½"
B09042BB	9 x 42	38,2	233	1074 ± 5	240	2 ½"
B09048BB	9 x 48	44,6	233	1228 ± 5	240	2 ½"
B10017BB	10 x 17	16,8	257	436 ± 4	269	2 ½"
B10019BB	10 x 19	19,1	257	502 ± 2	269	2 ½"
B10022BB	10 x 22	22,9	257	559 ± 4	269	2 ½"
B10024BB	10 x 24	25,1	257	605 ± 4	269	2 ½"
B10030BB	10 x 30	32,4	257	766 ± 4	269	2 ½"
B10035BB	10 x 35	38,9	257	903 ± 2	269	2 ½"
B10044BB	10 x 44	48	257	1122 ± 2	269	2 ½"
B10047BB	10 x 47	54	257	1188 ± 5	269	2 ½"
B10054BB	10 x 54	61	257	1385 ± 2	269	2 ½"
B10054GB	10 x 54	62	257	1382 ± 5	269	4"
B12048BB	12 x 48	76	304	1232 ± 3	315	2 ½"
B12052BB	12 x 52	84	304	1335 ± 3	315	2 ½"
B13044BB	13 x 44	85	334	1145 ± 6	330	2 ½"
B13054BB	13 x 54	103	334	1371 ± 3	330	2 ½"
B13054GB	13 x 54	103	334	1371 ± 3	330	4"


PARK RESIDENTIAL PRESSURE VESSELS WITHOUT BASE

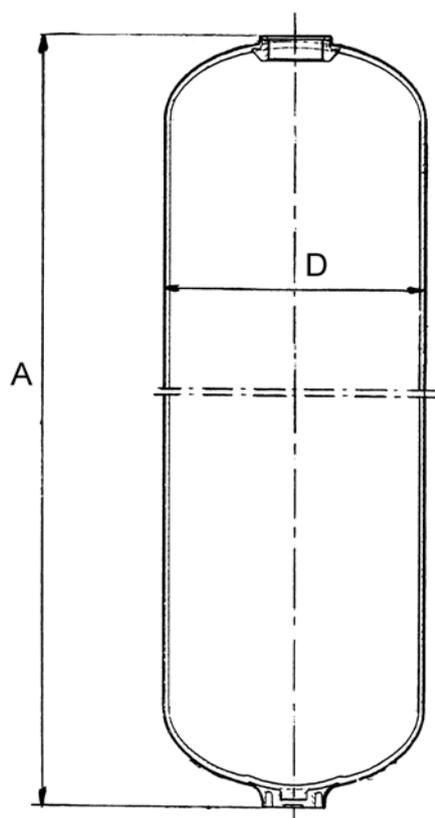

- composite pressure vessels PE liner reinforced with fiberglass and epoxy resin;
- for industrial and potable water treatment systems;
- European 97/23/EC Directive compliant for pressure equipment (PED);
- certification for contact with drinking water following EC directives and KTW recommendations;
- D.M. n.174 dated 06/04/2004 compliant about materials suitable for contact with water for human consumption;
- max operating pressure 10 bar;
- max operating temperature 50°C;
- top connection threaded 2 ½" – 8NPSM or 4"– 8UN;
- cycle test 250.000 times from 0,7 to 10 bar;
- burst test to 4 times max operating pressure;
- blue colour;
- warranty 5 years.

REF.	MODEL	VOLUME (liters)	DIAMETER (mm)	A (mm)	CONNECTION (inch)
B06013AB	6 x 13	4,3	156	329 ± 3	2 ½"
B07013AB	7 x 13	5,8	182	329 ± 3	2 ½"
B07017AB	7 x 17	8,3	182	431 ± 3	2 ½"
B07019AB	7 x 19	9,6	182	483 ± 3	2 ½"
B07024AB	7 x 24	12,6	182	611 ± 3	2 ½"
B07030AB	7 x 30	16,2	182	771 ± 3	2 ½"
B07035AB	7 x 35	19,1	182	891 ± 3	2 ½"
B08013AB	8 x 13	7,7	206	329 ± 3	2 ½"
B08017AB	8 x 17	11,0	206	431 ± 3	2 ½"
B08024AB	8 x 24	16,6	206	611 ± 3	2 ½"
B08030AB	8 x 30	21,4	206	771 ± 3	2 ½"
B08035AB	8 x 35	24,8	206	891 ± 3	2 ½"
B09017AB	9 x 17	13,7	232	431 ± 3	2 ½"
B09024AB	9 x 24	20,4	232	611 ± 3	2 ½"
B09030AB	9 x 30	26,6	232	771 ± 3	2 ½"
B09035AB	9 x 35	31,6	232	891 ± 3	2 ½"
B10017AB	10 x 17	16,8	257	431 ± 3	2 ½"
B10019AB	10 x 19	19,2	257	483 ± 3	2 ½"
B10024AB	10 x 24	25,1	257	611 ± 3	2 ½"
B10030AB	10 x 30	32,4	257	771 ± 3	2 ½"
B10035AB	10 x 35	38,4	257	891 ± 3	2 ½"


PARK DOME-HOLE RESIDENTIAL PRESSURE VESSELS

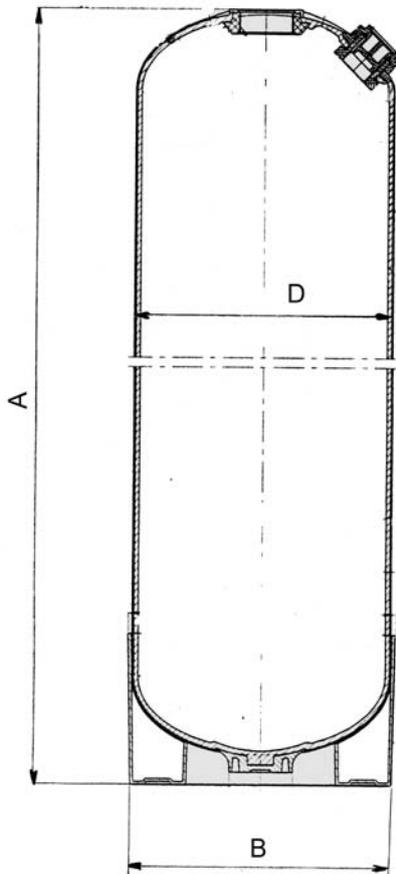

- composite pressure vessels PE liner reinforced with fiberglass and epoxy resin;
- 1 ¼" opening on the dome top of the tank with Noryl plug;
- for industrial and potable water treatment systems;
- European 97/23/EC Directive compliant for pressure equipment (PED);
- certification for contact with drinking water following EC directives and KTW recommendations;
- max operating pressure 10 bar;
- max operating temperature 50°C;
- top connection threaded 2 ½" – 8NPSM;
- cycle test 250.000 times from 0,7 to 10 bar;
- burst test to 4 times max operating pressure;
- blue colour;
- warranty 5 years.

REF.	MODEL	VOLUME (liters)	DIAMETER (mm)	A (mm)	B (mm)	CONNECTION (inch)
B10044QB	10 x 44 DH	48	257	1122	269	2 ½"
B10054QB	10 x 54 DH	61	257	1378	269	2 ½"
B12048QB	12 x 48 DH	76	304	1217	315	2 ½"
B13054QB	13 x 54 DH	103	364	1370	375	2 ½"


PARK INDUSTRIAL PRESSURE VESSELS WITH THREADED TOP OPENING

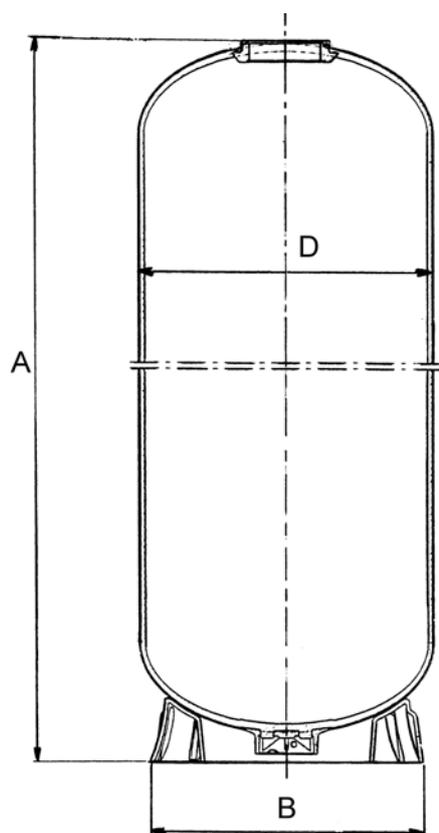

- composite pressure vessels PE liner reinforced with fiberglass and epoxy resin;
- for industrial and potable water treatment systems;
- European 97/23/EC Directive compliant for pressure equipment (PED);
- certification for contact with drinking water following EC directives and KTW recommendations;
- D.M. n.174 dated 06/04/2004 compliant about materials suitable for contact with water for human consumption;
- max operating pressure 10 bar;
- max operating temperature 50°C;
- threaded top connection 4”– 8UN;
- cycle test 250.000 times from 0,7 to 10 bar;
- burst test to 4 times max operating pressure;
- blue colour;
- warranty 5 years.

REF.	MODEL	VOLUME (liters)	DIAMETER (mm)	A (mm)	B (mm)	CONNECTION (inch)
B14052GB	14 x 52	122	369	1360 ± 15	330	4”
B14065GB	14 x 65	140	369	1645 ± 15	380	4”
B16052GB	16 x 52	128	406	1269 ± 9	420	4”
B16065GB	16 x 65	170	406	1632 ± 18	420	4”
B18036GB	18 x 36	138	469	1000 ± 15	510	4”
B18053GB	18 x 53	211	469	1432 ± 15	510	4”
B18065GB	18 x 65	250	469	1726 ± 20	510	4”
B21036GB	21 x 36	164	552	1025 ± 15	510	4”
B21053GB	21 x 53	277	552	1434 ± 15	510	4”
B21060GB	21 x 60	310	552	1625 ± 15	510	4”
B24069GB	24 x 69	450	610	1870 ± 20	510	4”
B30072GB	30 x 72	710	770	1896 ± 15	730	4”
B36072GB	36 x 72	1020	938	2001 ± 15	730	4”


PARK INDUSTRIAL PRESSURE VESSELS WITH TOP&BOTTOM THREADED OPENINGS

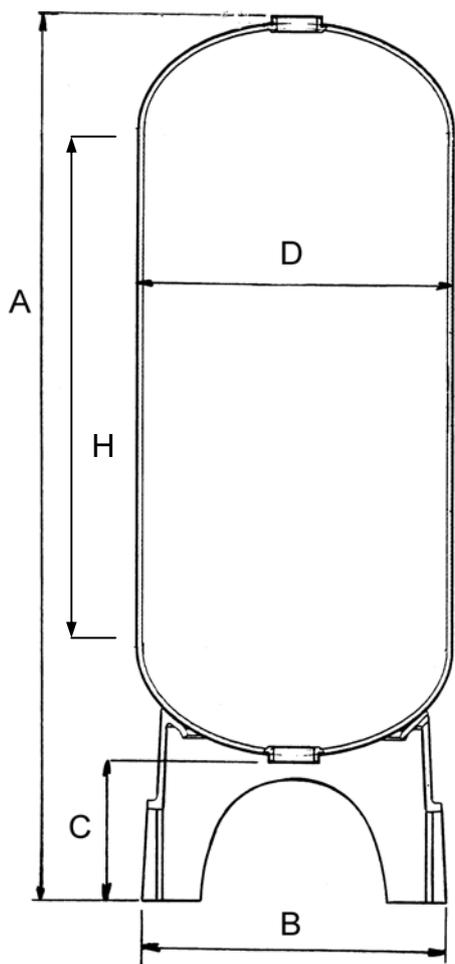

- composite pressure vessels PE liner reinforced with fiberglass and epoxy resin;
- for industrial and potable water treatment systems;
- European 97/23/EC Directive compliant for pressure equipment (PED);
- certification for contact with drinking water following EC directives and KTW recommendations;
- D.M. n.174 dated 06/04/2004 compliant about materials suitable for contact with water for human consumption;
- max operating pressure 10 bar;
- max operating temperature 50°C;
- top and bottom threaded connection 4"– 8UN;
- cycle test 250.000 times from 0,7 to 10 bar;
- burst test to 4 times max operating pressure;
- blue colour;
- warranty 5 years.


REF.	MODEL	VOLUME (liters)	DIAMETER (mm)	A (mm)	B (mm)	C (mm)	H (mm)	CONNECTION (inch)
B14065HB	14 x 65	140	369	2031 ± 10	488	381	1378	4"
B16065HB	16 x 65	170	406	2031 ± 20	497	384	1371	4"
B18065HB	18 x 65	245	469	2080 ± 20	554	404	1350	4"
B21060HB	21 x 60	310	552	1923 ± 20	554	389	1155	4"
B24069HB	24 x 69	450	610	2169 ± 20	615	422	1327	4"
B30072HB	30 x 72	712	770	2248 ± 20	816	413	1313	4"
B36072HB	36 x 72	1080	927	2305 ± 20	1001	408	1266	4"

PARK INDUSTRIAL PRESSURE VESSELS WITH FLANGED TOP OPENING

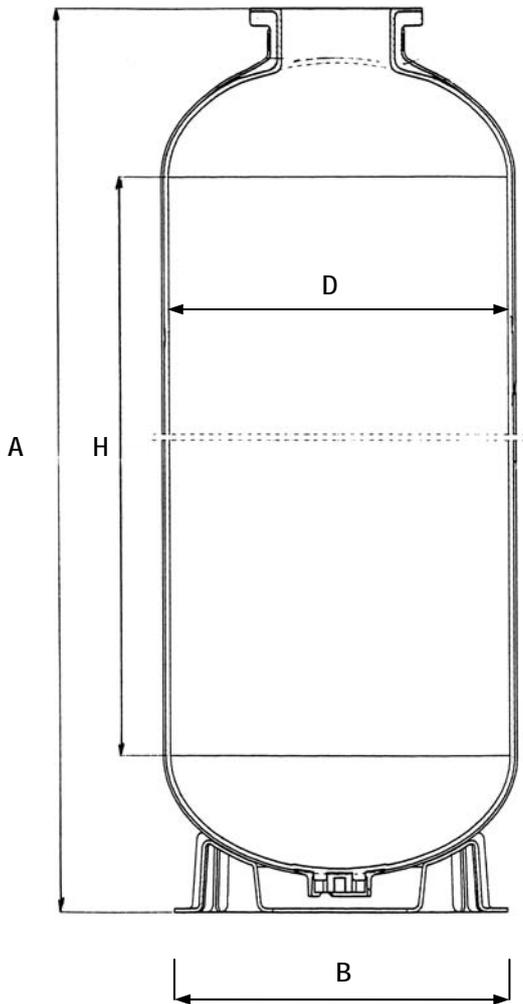


- composite pressure vessels PE liner reinforced with fiberglass and epoxy resin;
- for industrial and potable water treatment systems;
- European 97/23/EC Directive compliant for pressure equipment (PED);
- certification for contact with drinking water following EC directives and KTW recommendations;
- D.M. n.174 dated 06/04/2004 compliant about materials suitable for contact with water for human consumption;
- max operating pressure 10 bar;
- max operating temperature 65°C;
- 6" top connection;
- cycle test 250.000 times from 0,7 to 10 bar;
- burst test to 4 times max operating pressure;
- blue colour;
- warranty 5 years.

FLANGED TOP OPENING DETAIL

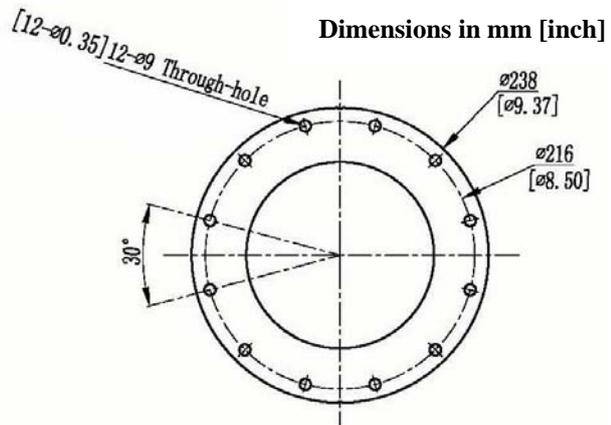


REF.	MODEL	VOLUME (liters)	DIAMETER (mm)	A (mm)	B (mm)	H (mm)	CONNECTION (inch)
B18068LB	18 x 68	248	469	1777 ± 15	510	1344	6"
B21062LB	21 x 62	310	552	1673 ± 10	510	1159	6"
B24075LB	24 x 75	450	610	1908 ± 10	510	1320	6"
B30078LB	30 x 78	710	770	2058 ± 15	768	1282	6"
B36078LB	36 x 78	1020	927	2134 ± 15	768	1235	6"

PARK INDUSTRIAL PRESSURE VESSELS WITH FLANGED TOP & BOTTOM OPENINGS

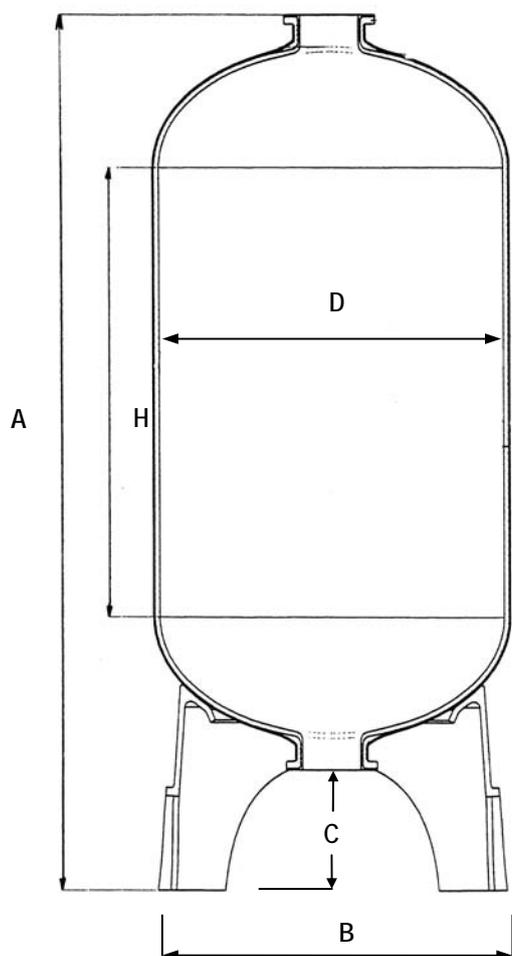

- composite pressure vessels PE liner reinforced with fiberglass and epoxy resin;
- for industrial and potable water treatment systems;
- European 97/23/EC Directive compliant for pressure equipment (PED);
- certification for contact with drinking water following EC directives and KTW recommendations;
- D.M. n.174 dated 06/04/2004 compliant about materials suitable for contact with water for human consumption;
- max operating pressure 10 bar;
- max operating temperature 65°C;
- top and bottom 6" flange connection;
- cycle test 250.000 times from 0,7 to 10 bar;
- burst test to 4 times max operating pressure;
- blue colour;
- warranty 5 years.

FLANGED TOP & BOTTOM OPENINGS DETAIL

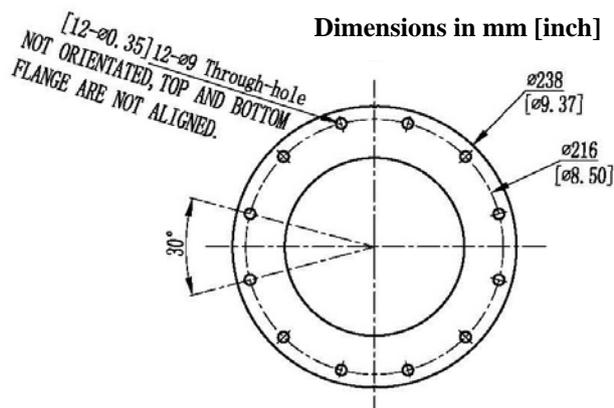

REF.	MODEL	VOLUME (liters)	DIAMETER (mm)	A (mm)	B (mm)	C (mm)	H (mm)	CONNECTION (inch)
B18068MB	18 x 68	250	469	2020 ± 15	545	240	1344	6"
B21066MB	21 x 66	310	552	2010 ± 10	545	368	1158	6"
B24075MB	24 x 75	450	610	2220 ± 10	620	354	1320	6"
B30078MB	30 x 78	710	770	2285 ± 15	778	365	1284	6"
B36078MB	36 x 78	1020	910	2395 ± 20	925	360	1235	6"
B42063MB	42 x 63	1047	1074	2065 ± 10	1085	440	775	6"
B42072MB	42 x 72	1360	1074	2485 ± 15	1085	440	1142	6"
B48072MB	48 x 72	1840	1220	2500 ± 15	1240	400	1135	6"
B63067MB	63 x 67	2344	1623	2005 ± 20	1560	357	524	6"
B63086MB	63 x 86	3061	1623	2405 ± 20	1560	357	926	6"