


# DETAN ROD SYSTEMS

## TECHNICAL PRODUCT INFORMATION

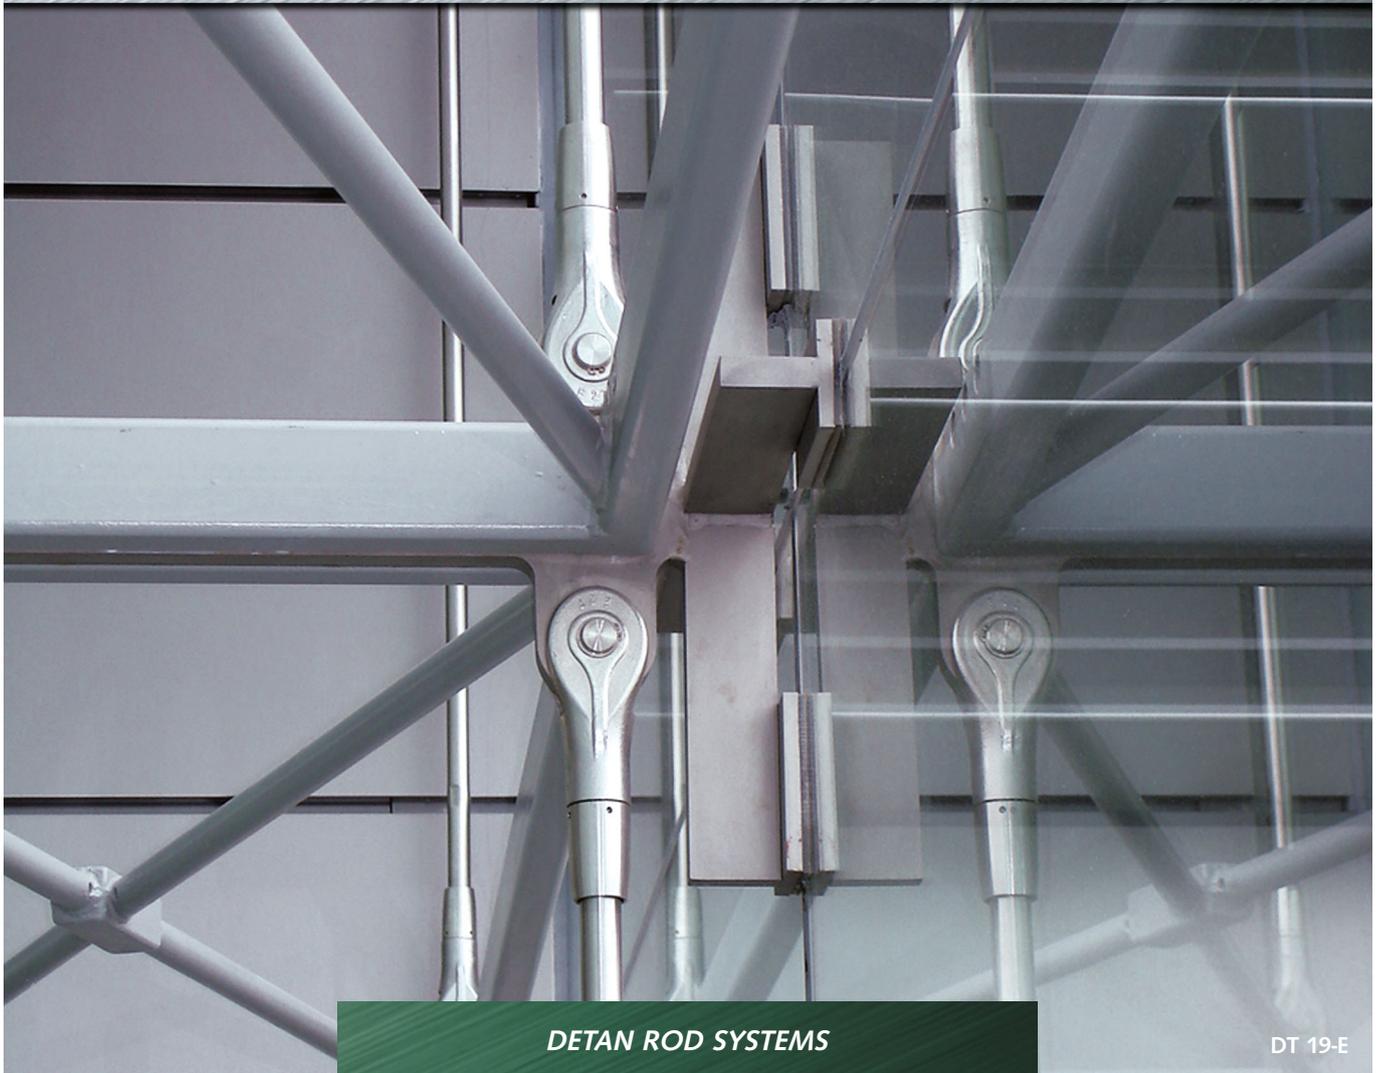

DETAN ROD SYSTEMS

DT 19-E

FAÇADE

**NEW!**

DETAN Tension rod system: now with up to 15% higher load capacity!



**HALFEN**  
A CRH COMPANY

# HALFEN DETAN

## The filigree tension and compression rod system

**M**odern architecture strives to be both practical and functional, but also to allow design of more artistically exceptional buildings. With the DETAN Rod system, HALFEN provides an innovative product solution which meets all the requirements; maximum aesthetics, technological reliability, and quality.

HALFEN provides a design software and qualified support to optimize planning of your tension and compression rod system.

### Quality characteristics

- Project specific configurations for system diameter and length
- High steel load capacities
- Large selection of rod diameters
- Hot-dip galvanized and stainless steel finishes
- Hot-dip galvanized, brushed threads
- Seal-sets for maximum corrosion protection

### Additional advantages

- Compression rods complement the DETAN System
- Cross couplers available as an alternative to disc couplers
- Complimentary design-software and planning support



### Optimized site-logistics

Efficient rod marking and project specific labelling for easy installation.

DETAN Rod systems are delivered pre-assembled.

### Applications

- Lattice frame elements and wind bracing in roofs and walls
- Suspension of pylons and canopies
- Bracing of timber and steel support beams
- Back-bracing of glass façades
- Suspension of pedestrian bridges



Highest quality and maximum aesthetics.

# DETAN ROD SYSTEMS

---

## Contents



### DETAN ROD SYSTEM

- Application examples	4
- DETAN as a design element	6
- System overview	8

---

### DETAN ROD SYSTEM-Steel

- DETAN-S Tension rods and accessories	12
- DETAN-S Connection plates	13
- DETAN-S Cross-bracings	13
- DETAN-S Couplers	13

---

### DETAN ROD SYSTEM-Stainless steel

- DETAN-E Tension rods and accessories	14
- DETAN-E Connection plates	15
- DETAN-E Cross-bracings	15
- DETAN-E Couplers	15

---

- Compression rod system DETAN-S / DETAN-E	16
- Duplex-coating	17
- Cross-bracings and compression rods	18
- Connection plates and installation	19
- The advantages at a glance	20
- Corrosion protection	20
- On-site logistics	20
- Design software	21
- European Technical Assessments	22
- Pretensioning	23
- Tender specification	25
- Order forms	26
- Addresses / contact	28

---

# DETAN ROD SYSTEMS


## Applications

### Application – examples



The DETAN Tension and compression rod systems are a perfect match, both structurally and aesthetically. DETAN is suitable for use in all types of bracing applications.

To complement the DETAN range we offer a wide selection of services and accessories, for example, disc couplers and cross couplers; providing construction details and assistance in further possible applications.

### Bracing under beams

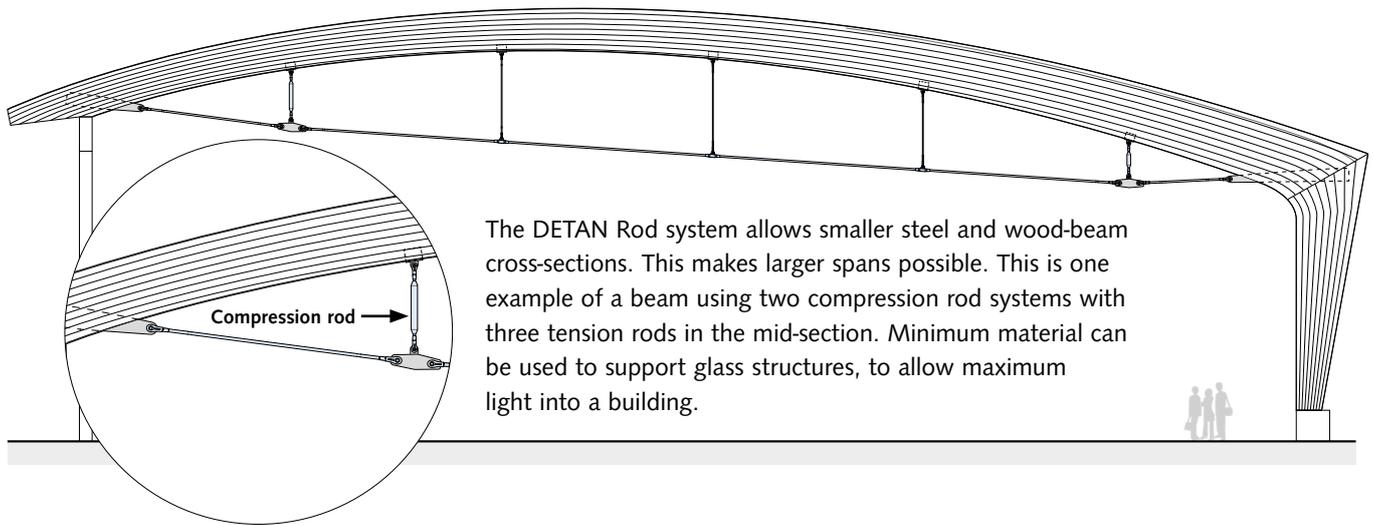


### Stiffeners and Bracings

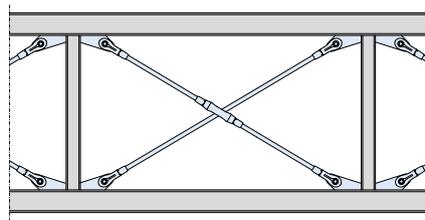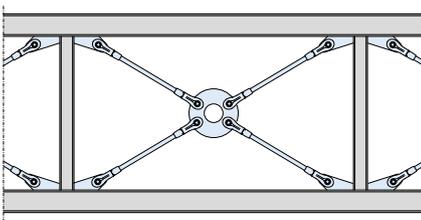

Statically required wind-bracing in roofs and walls can be aesthetically designed as a visual focus-point using the tension rod system. Cross bracing is possible either with a cross coupler or an anchor disc.

### Suspensions

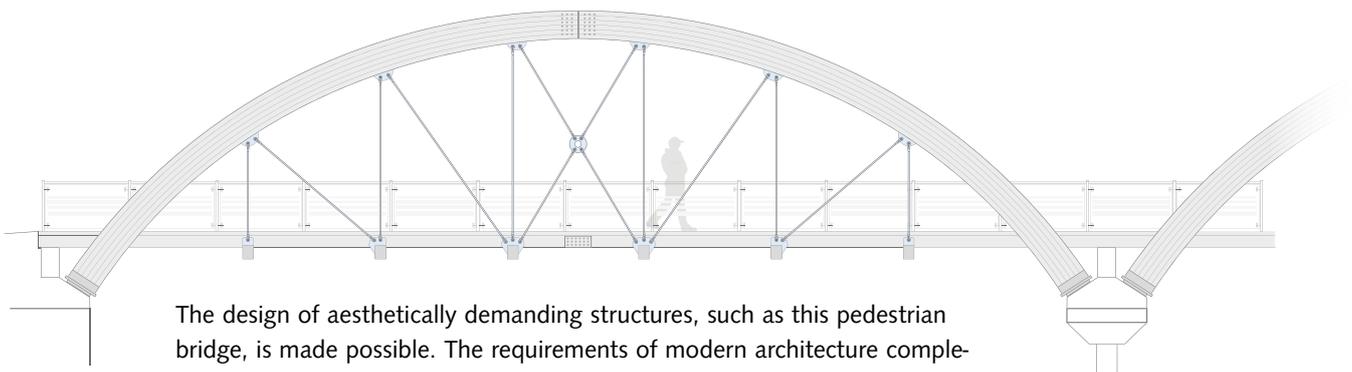


The design of aesthetically demanding structures, such as this pedestrian bridge, is made possible. The requirements of modern architecture complement the static requirements perfectly.

# DETAN ROD SYSTEMS


## Applications

### Application – examples

#### Canopy suspensions

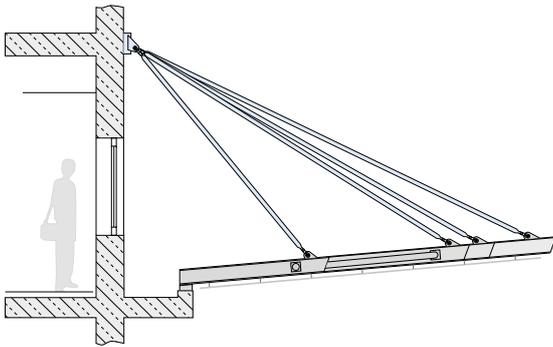

The DETAN System allows bracings to be designed using a minimum of obtrusive structural elements, leaving them almost invisible. Statically required elements are simultaneously used as design elements. The visually, unobtrusive bracing elements give the whole structure an overall lightness. Applications are suspended canopies in all types of commercial and industrial projects. The DETAN Rod system is suitable for **tension** and **compression** loads.

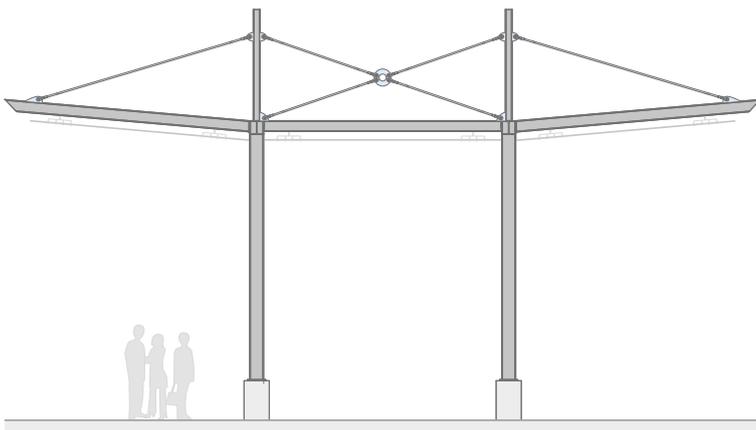

#### Back-braced glass-façades



The DETAN Rod system allows filigree support structures for glass-façades to be realized.

## DETAN ROD SYSTEMS

### DETAN - as a Design Element

#### Reference



The DETAN Rod system was used as a visual, creative design element in this project.

The effect is an elegant, aesthetic structure.


DETAN fits perfectly into the architectural concept and significantly contributes to the overall style.

Project:  
Manchester Civil  
Justice Centre,  
England, UK

## DETAN ROD SYSTEMS

### DETAN - as a Design Element

#### Reference

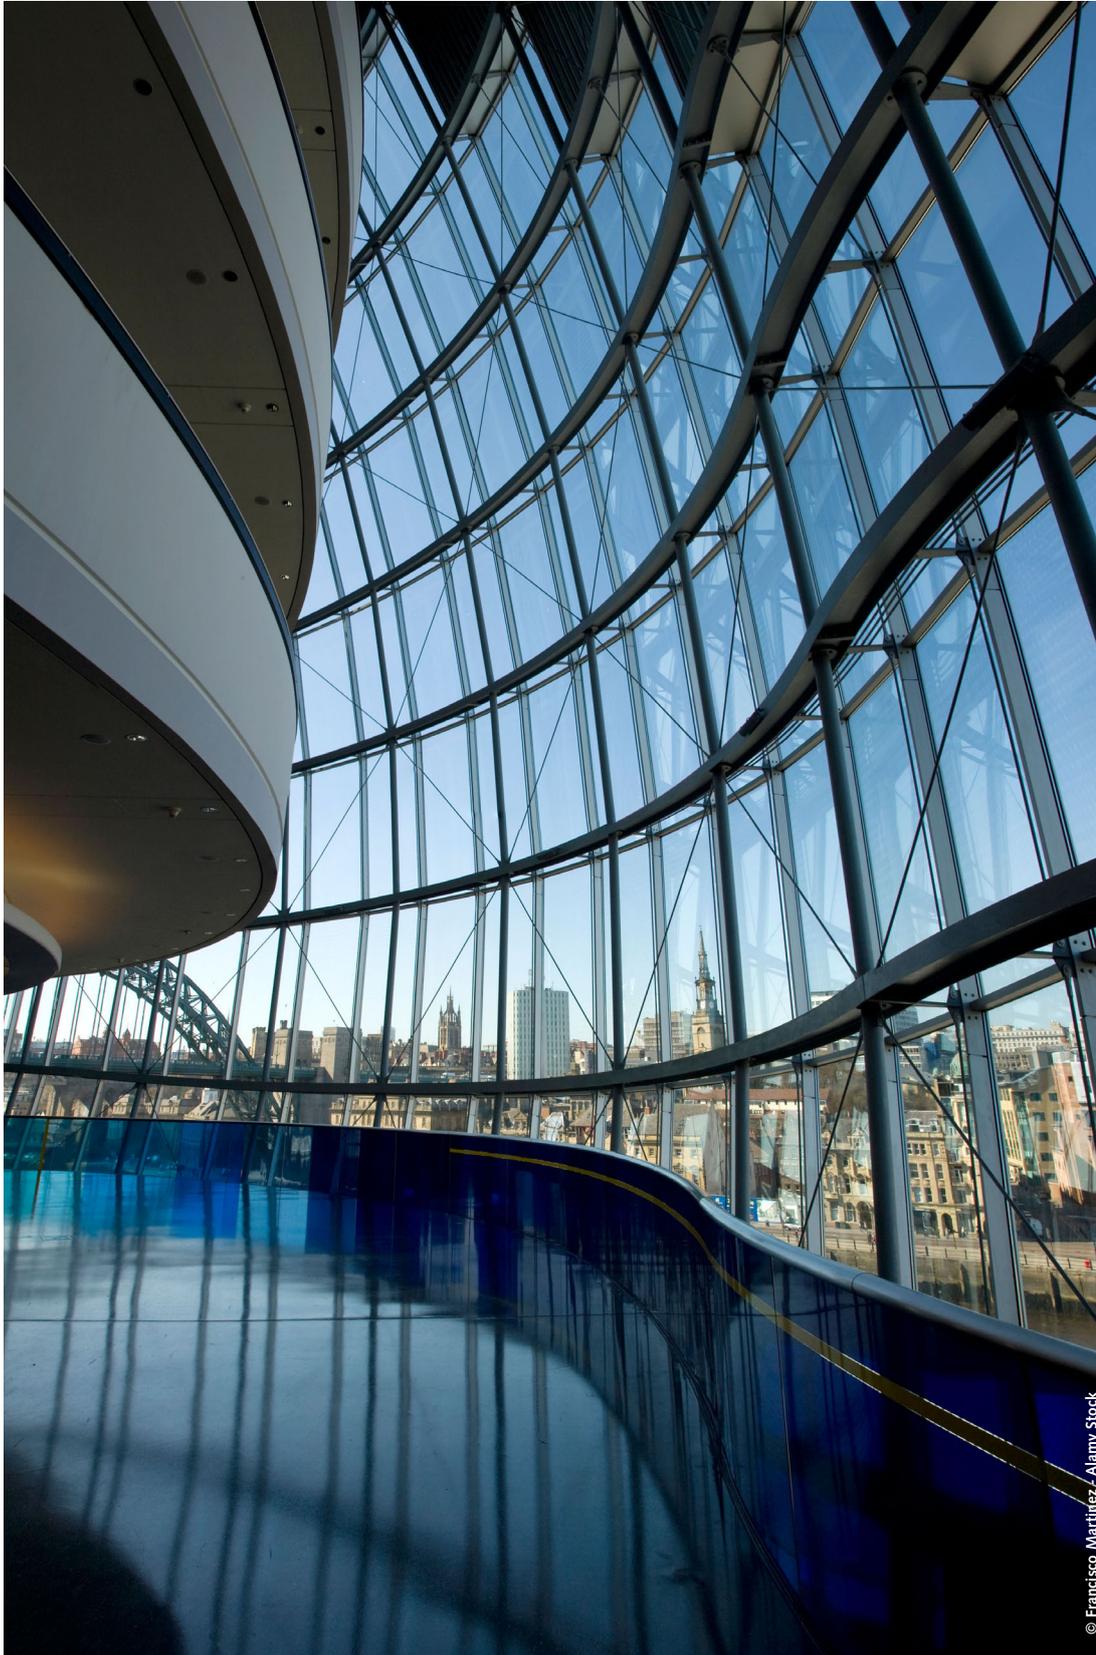

Cross bracings provide a futuristic, lightweight construction.

For structural reasons, DETAN Tension rods run diagonally across the glazed façade.

The filigree DETAN system is perfectly integrated, emphasizing the fascinating overall impression of the building.

Project:  
The Sage, Gateshead,  
England, UK


© Francisco Martínez, Alamy Stock

# DETAN ROD SYSTEMS

## System Overview

### DETAN Tension rod system

#### Basic system:


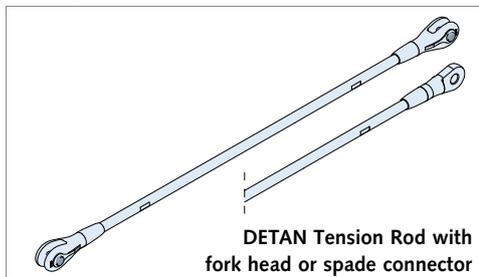


Ordering procedure → page 9  
 Load capacity, system dimensions and materials:  
 Steel → pages 12-13  
 Stainless steel → pages 14-15





**The DETAN Rod systems are only approved for predominantly static loads.**

#### System variants:

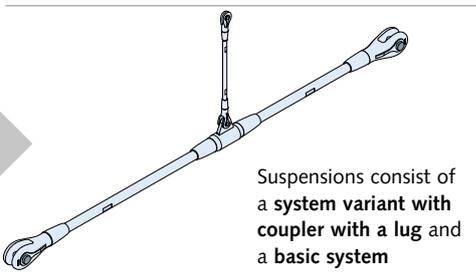
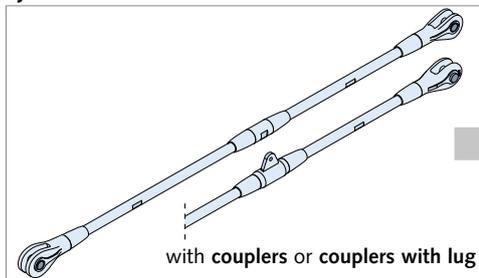


Ordering example → page 9  
 Load capacity, system dimensions and materials:  
 Steel → pages 12-13  
 Stainless steel → pages 14-15

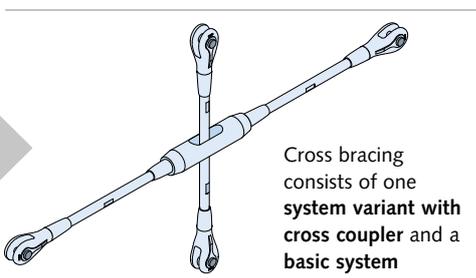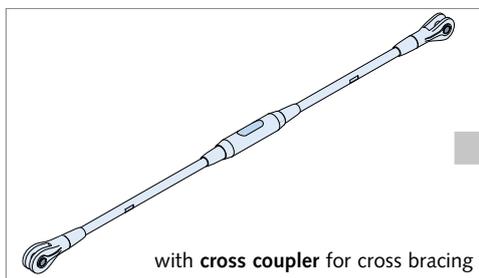


Ordering example → page 10  
 Load capacity, system dimensions and materials:  
 Steel → pages 12-13  
 Stainless steel → pages 14-15

#### Cross bracing:

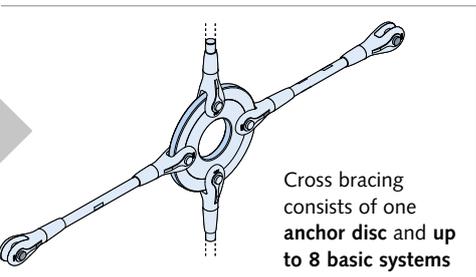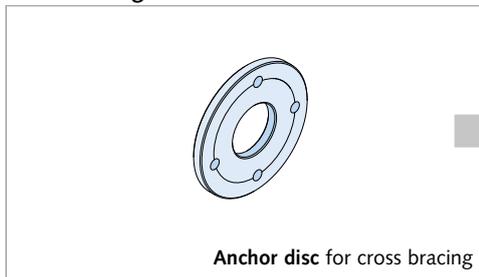

Ordering example → page 11  
 Load capacity, system dimensions and materials:  
 Steel → pages 12-13  
 Stainless steel → pages 14-15

### DETAN Compression rod system

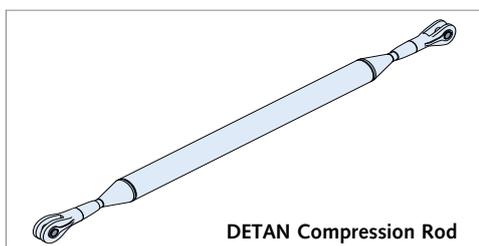

Ordering example → page 16  
 Load capacity, system dimensions and materials → pages 16-18

### HALFEN Pretension unit



More information → pages 23-24

# DETAN ROD SYSTEMS

## Product Range Overview: DETAN Tension Rod System


### Ordering procedure

Example order: Tension rod system, DETAN-S,  $d_s = 30$  mm,  $L = 4500$  mm FV, 1 coupler

Product / DETAN System/ system diameter  $d_s$  / system length  $L$  / specification

Abbreviations:  
WB = mill finish  
FV = HDG = hot-dip galvanized


### Basic system

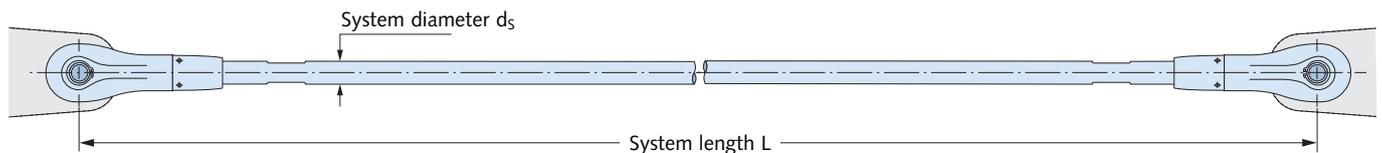

Ordering example (material steel HDG): Tension rod system, DETAN-S,  $d_s = 52$  mm,  $L = 3620$  mm FV

### System variants


with coupler:

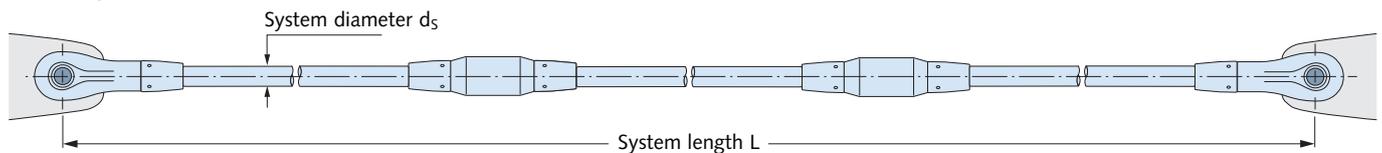

Ordering example (stainless steel): Tension rod system, DETAN-E,  $d_s = 24$  mm,  $L = 11200$  mm, 2 couplers

**Note:** Maximum 5 couplers are possible.

coupler with lug:

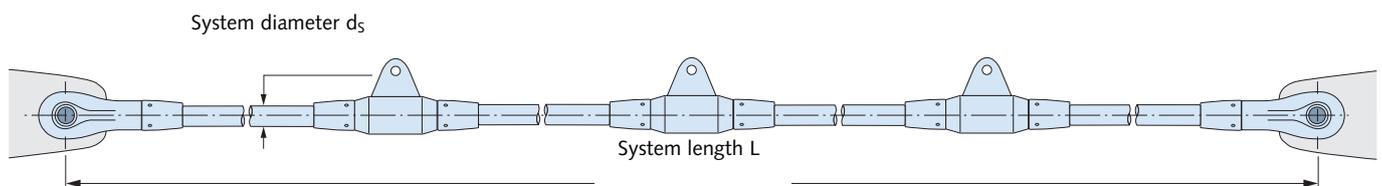

Ordering example (material steel HDG): Tension rod system, DETAN-S,  $d_s = 30$  mm,  $L = 34000$  mm FV, 3 couplers with lug

#### System DETAN-S, European Technical Assessment ETA-05/0207

System diameter $d_s$ [mm]	10	12	16	20	24	27	30	36	42	48	52	56	60	76	85	95
Available <b>minimum system length</b> $L$ [mm]																
Rod hot-dip galvanized	250	310	360	440	520	560	600	700	810	940	990	1050	1160	1480	1640	1810
Available <b>maximum system length</b> $L$ with <u>one</u> rod [mm]																
Rod hot-dip galvanized	6060	6070	12080	12100	12120	12140	12140	12170	12220	12260	12270	12290	12320	15430	15480	15530

#### System DETAN-E, European Technical Assessment ETA-11/0311


System diameter $d_s$ [mm]	6	8	10	12	16	20	24	27	30
Available <b>minimum system length</b> $L$ [mm]									
Polished	190	210	250	310	360	440	520	560	600
Available <b>maximum system length</b> $L$ with <u>one</u> rod [mm]									
Polished	3040	6050	6060	6070	6080	6100	6120	6140	6140

# DETAN ROD SYSTEMS

## Product Range Overview: DETAN Tension Rod System

### System variants

Cross coupler for cross bracing:

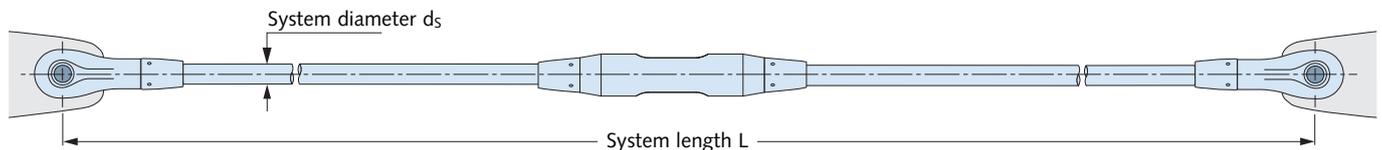


Ordering example (material steel HDG): Tension rod system, DETAN-S,  $d_s = 30$  mm,  $L = 5600$  mm FV, 1 cross coupler

### DETAN-S und DETAN-E System dimensions

System - Ø $d_s$ [mm]	6	8	10	12	16	20	24	27	30	36	42	48	52	56	60	76	85	95
Min. L system length	190	210	250	310	360	440	520	560	600	700	810	940	990	1050	1160	1480	1640	1810
Reduction for 2× fork	44	51	60	73	85	107	128	140	148	179	220	264	277	290	324	432	482	532
$0_m$	10.5	12.5	15.0	18.5	22.5	27.0	34.0	37.5	42.5	51.0	55.0	62.5	70.5	77.5	85.0	115.0	130.0	155.0
$L_{km}$	70	85	100	120	142	166	200	222	242	284	310	348	400	440	478	631	710	830
min. system length	400	450	550	650	750	900	1050	1150	1200	1400	1600	1850	2000	2100	2300	2950	3250	3650

### Minimal system length

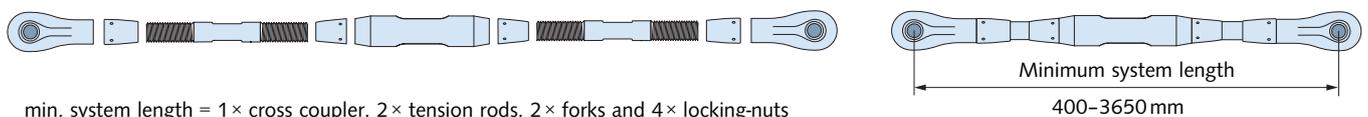

min. system length = 1 × cross coupler, 2 × tension rods, 2 × forks and 4 × locking-nuts


### System variant with asymmetric distribution of couplers

#### Order with specification of system length L:

HALFEN calculates the rod lengths and minimum and maximum system length. The couplers are distributed symmetrically. If an asymmetric distribution of the couplers is required, a drawing with all necessary measurements must be included. Alternatively, order using the HALFEN dimensioning software, see page 21.

HALFEN will detail complex rod systems as one configured system.

**A drawing with system dimensions is sufficient.**

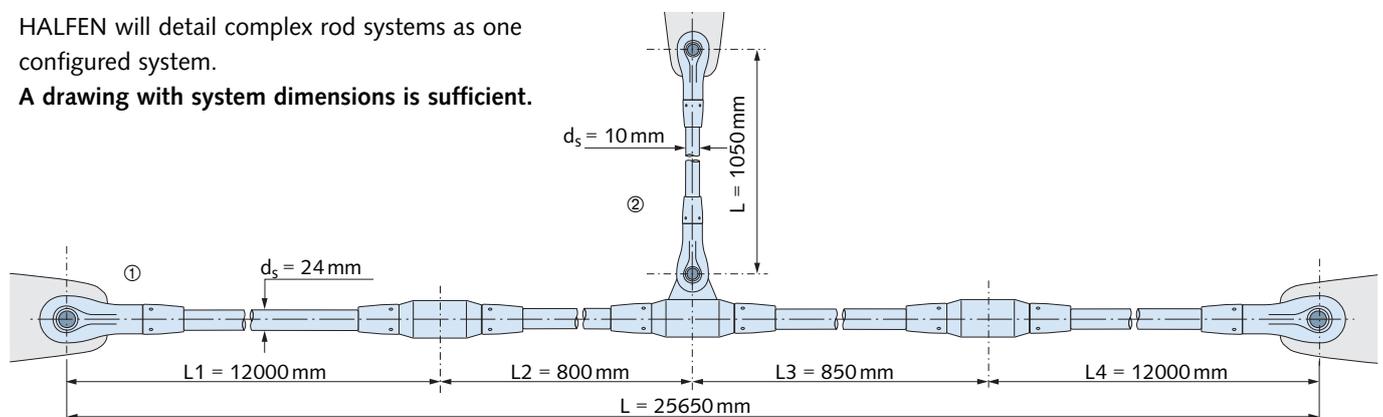

Ordering example:


- ① Tension Rod System, DETAN-S,  $d_s = 24$  mm, system length according to drawing, WB, couplers according to drawing
- ② Tension Rod System, DETAN-S,  $d_s = 10$  mm, system length  $L = 1050$  mm WB

# DETAN ROD SYSTEMS

## Product Range Overview: Cross Bracings, DETAN Compression Rod System

### Cross bracings

#### Anchor disc

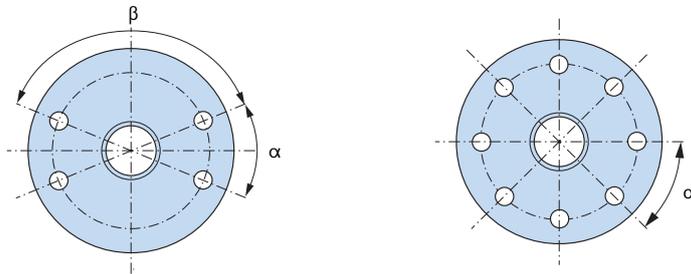

#### Note:

- maximum 8 tension rod connections are possible
- connecting angle  $\alpha_{\min} = 40^\circ$



1. Ordering example (material steel): Anchor disc, DETAN-S,  $d_s = 42$  mm, 4 holes drilled  $\alpha = 40^\circ$ ,  $\beta = 140^\circ$  (see drawing), FV
2. Ordering example (material stainless steel): Anchor disc, DETAN-E,  $d_s = 24$  mm, 8 holes drilled  $\alpha = 45^\circ$  (see drawing)

#### System DETAN-S, European Technical Assessment ETA-05/0207

System diameter $d_s$ [mm]	10	12	16	20	24	27	30	36	42	48	52	56	60	76	85	95
----------------------------	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

#### System DETAN-E, European Technical Assessment ETA-11/0311

System diameter $d_s$ [mm]	6	8	10	12	16	20	24	27	30
----------------------------	---	---	----	----	----	----	----	----	----

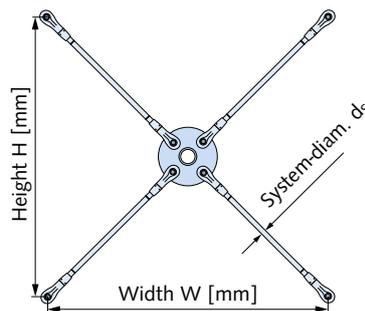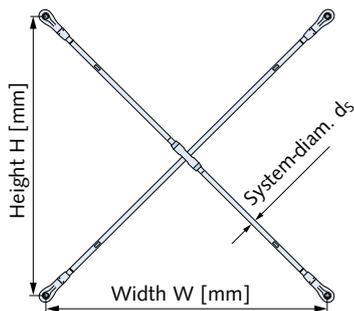

Alternatively, please enquiries for **complete systems** with bracings as cross couplers or as anchor disks. **A drawing with system dimensions is sufficient.**

### Set articles and individual components

	• Tension rod (specify rod length separately)		• Pin
	• Fork connection set: Fork, locking nuts, pins, circlips, sealing kit ①, left-hand thread		• Locking nut, left-hand thread
	• Fork connection set: Fork, locking nuts, pins, circlips, sealing kit ①, right-hand thread		• Locking nut, right-hand thread
	• Coupler set: coupler + 2 locking nuts, sealing kit ①		• Flat seal
	• Coupler set with lug: coupler with lug + 2 locking nuts, sealing kit ①		• Round seal
	• Cross coupler set: cross coupler + 2 locking nuts, sealing kit ①		• Circlip for one fork
	• Spanner		• Coupler, with lug
			• Coupler, without lug
			• Fork, left-hand thread
			• Fork, right-hand thread
			• Cross coupler

① Stainless steel variant is without sealing kit  
Type tests and certification are only valid when using components as a complete system

1. Ordering example: Connection set, DETAN-S,  $d_s = 20$  mm, left-hand thread, FV
2. Ordering example: Tension rod, DETAN-E,  $d_s = 10$  mm,  $L = 500$  mm, left thread length = 120mm, right thread length = 150mm

# DETAN ROD SYSTEMS

## System DETAN-S, European Technical Assessment ETA-05/0207


System components — materials and finish								
		Tension rod			Fork		Couplers, locking nuts	Anchor disc
System diameter $d_s$ [mm]		10-12	16-76	85 - 95	10-12	16-95	10-95	10-95
Material		S355J2	S520	S470	S355J2	G20 Mn5+QT	S355J2/S235JR	S355J2
Finish	FV	hot-dip galvanized			hot-dip galvanized		hot-dip galvanized	hot-dip galvanized
	WB	mill finish			hot-dip galvanized		hot-dip galvanized	hot-dip galvanized

**NEW!**


System load capacities; system- and available rod lengths; material specification, steel strength grade S355 (diameter $d_s$ 10-12) or S470/S520																
System diameter $d_s$ [mm]	10	12	16	20	24	27	30	36	42	48	52	56	60	76	85	95
System load capacities																
Load capacity $F_{t,R,d}$ [kN]	21.3	30.94	81,22	126,9	182,7	238,1	290,6	423,4	581,1	763,7	911,3	1052.4	1224.5	2016.2	2493.7	3161.6
Available <b>minimum system length L</b> [mm]																
mill finish, hot-dip galvanized	250	310	360	440	520	560	600	700	810	940	990	1050	1160	1480	1640	1810
Available <b>maximum system length with one rod</b> [mm]																
mill finish, hot-dip galvanized	6060	6070	12080	12100	12120	12140	12140	12170	12220	12260	12270	12290	12320	15430	15480	15530
Available <b>maximum rod length L</b> [mm]																
mill finish, hot-dip galvanized	6000			12000									15000			

In accordance with ETA-05/0207 the partial safety value for the table above are assumed as  $\gamma_{M0} = 1.1$  and  $\gamma_{M2} = 1.25$   
 Design load  $F_{t,R,d}$  according to annex B11 of ETA-05/0207. The load capacities of in this table were determined on the basis of different available material strengths. The up to 15% higher design values can be achieved with strength class S520. The design values of all strength classes can be found in annex B11 of ETA-05/0207.

### Fork

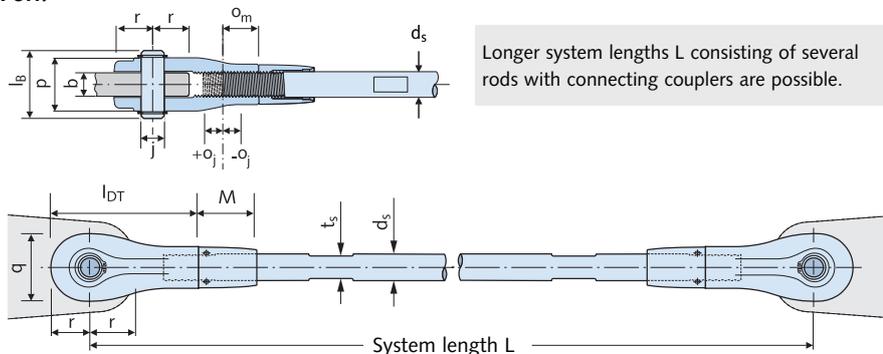

### Spade

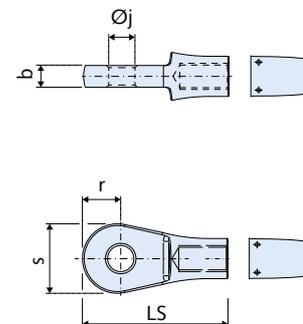

System dimensions [mm], materials — see table above																	
System diameter	$d_s$	10	12	16	20	24	27	30	36	42	48	52	56	60	76 ①	85 ①	95 ①
Fork length	$L_{DT}$	60	73	89	110	133	147	160	192	225	265	285	305	335	460	520	580
Pin length	$l_B$	28	32	44	52	60	65	72	84	97	111	119	130	139	180	202	229
Fork breadth	$p$	20	24	33	40	46	51	57	68	79	90	98	107	116	146	166	189
Fork height	$q$	26	31	41	51	61	69	75	90	105	119	125	137	146	196	216	236
Thread depth	$o_m$	15.0	18.5	22.5	27.0	34.0	37.5	42.5	51.0	55.0	62.5	70.5	77.5	85.0	115	130	155
Screw adjustment range	$o_j$	5.0	6.5	7.5	8.0	11.0	12.5	12.5	14.0	15.0	17.5	20.0	22.5	25.0	39	45	60
Length locking nut	$M$	24.5	37.0	41.0	50.0	58.0	63.0	64.0	72.0	83.0	91.0	98.0	105	112	148	165	205
Spade length	$LS$	60	73	89	110	133	147	160	192	225	265	285	305	335	460	520	580
Spade width	$s$	28	33	43	56	69	79	87	104	126	144	153	163	174	240	270	300
Tension rod	Spanner width $t_s$															Hook spanner ②	
		8	10	14	18	21	24	27	32	36	41	46	50	55	90/6	90/6	155/6
Locking nuts	Use soft touch pliers	With hook spanner															
			25-28	30-32	34-36	40-42	45-50	52-55	68-75	68-75	80-90	80-90	80-90	155/8	155/8	230/10	

① Delivery time on request.

② When using a chain tensioner instead of a hook spanner we recommend protecting the rod surface against damage (also applies to the couplers).


Corrosion protection: rod thread hot-dip galvanized. Fork threads sealed with stoppers. Also see page 20 for sealing system

# DETAN ROD SYSTEMS

## System DETAN-S, European Technical Assessment ETA-05/0207

### Connecting plates

The load transfer from the rod system into the plates is considered as verified if the dimensions in the table have been observed. Plates are not included in the scope of delivery.

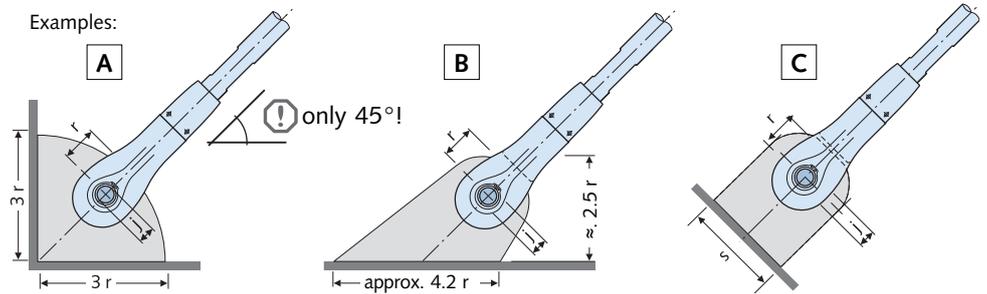


**Note:** A can only be used when simultaneously using the circular anchor disc at 45°, see page 19.

Dimensions [mm]; Material – minimum qualities for diameter 10-12, steel strength grade S235JR; or for diameter 16-95, steel strength grade S355J2																	
System diameter	$d_s$	10	12	16	20	24	27	30	36	42	48	52	56	60	76	85	95
Thickness conn. plate	$b$	8	10	15	18	20	22	25	30	35	40	45	50	55	65	75	85
Hole diameter for pin	$j$	9.5	11.5	15.5	19.5	23.5	26.5	29.5	33.5	41	47	49	53	57	76	86	96
Hole position	$r$	15	18	24	29	35	39	43	51	60	70	76	83	88	129	149	159
Minimum width	$s$	28	33	40	51	64	73	80	94	113	129	142	151	161	216	240	270

### Cross bracing

Option 1: Anchor disc, Standard K40 (smallest connecting angle  $\alpha_{min} = 40^\circ$ )


Example: Anchor disc with 4 tension rods (max. of 8 rod connections per disc)

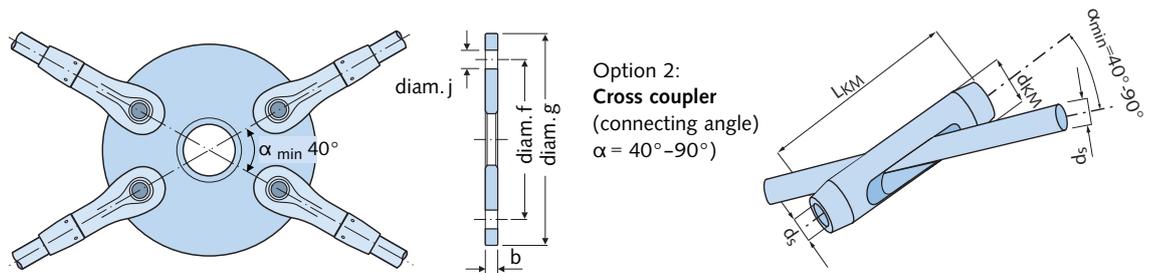

Anchor disc – Dimensions [mm]; material specification, steel strength grade S355J2, hot-dip galvanized																	
System diameter	$d_s$	10	12	16	20	24	27	30	36	42	48	52	56	60	76	85	95
Diameter of outer holes	$f$	90	110	140	180	210	240	260	310	360	420	450	490	520	702	777	832
Outer anchor disc - diam.	$g$	120	146	186	238	280	318	346	412	480	558	600	652	692	960	1075	1150

Cross coupler – Dimensions [mm]; material specification, steel strength grade S355J2, hot-dip galvanized																	
System diameter	$d_s$	10	12	16	20	24	27	30	36	42	48	52	56	60	76	85	95
Coupler length	$L_{KM}$	100	120	142	166	200	222	242	284	310	348	400	440	478	631	710	830
Coupler diameter	$d_{KM}$	20	24	32	39	46	52	57	70	80	93	101	112	120	154	173	194

### Couplers

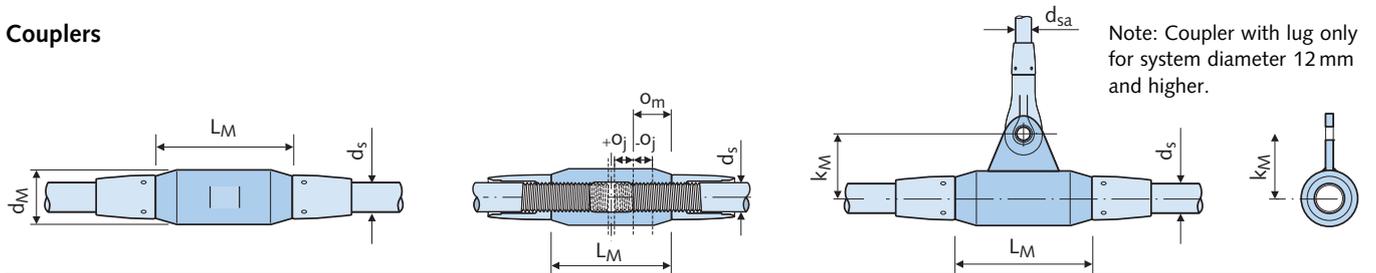

Dimensions [mm]; material specification, steel strength grade S355J2, hot-dip galvanized																	
System diameter	$d_s$	10	12	16	20	24	27	30	36	42	48	52	56	60	76	85	95
Coupler length	$L_M$	40	50	62	78	94	104	120	140	158	180	195	210	245	328	370	450
Coupler diameter	$d_M$	20	22	28	35	42	47	53	64	75	87	93	98	104	155	180	195
Thread depth	$o_m$	15.0	18.5	22.5	27.0	34.0	37.5	42.5	51.0	55.0	62.5	70.5	77.5	85.0	115	130	155
Screw adjustment range	$o_j$	5.0	6.5	7.5	8.0	11.0	12.5	12.5	14.0	15.0	17.5	20.0	22.5	25.0	39	45	60
Suspension system diam.	$d_{sa}$	-	10	10	10	10	10	10	10	10	12	12	12	12	12	16	16
Offset of suspension hole	$k_M$	-	28.0	31.0	44.5	48.0	50.5	57.5	72.0	86.5	98.5	111.5	124.5	137.0	140.0	150.0	157.5
Hook spanner size		-	-	-	-	-	-	-	-	-	-	-	-	-	155/8	230/10	230/10

## DETAN ROD SYSTEMS


### System DETAN-E in Stainless Steel, European Technical Assessment ETA-11/0311

System components – material and design					
	Tension rod ②	Fork ②	Couplers ③, locking nuts ④	Pins ②, circlips ①	Anchor disc ④
System diameter $d_s$ [mm]	6-30	6-30	6-30	6-30	6-30
Material	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Finish	polished	polished	polished	polished	polished
① circlips according to DIN 471, stainless steel 1.4568/1.4568			③ material stainless steel, strength grade S355		
② material stainless steel, strength grade S460			④ material stainless steel, strength grade S235		
Stainless steel acc. to ETA 11/0311, annex 2 corresponds to corrosion resistance class III					

**Note:** When using DETAN-E the effects of corrosion for various ambient conditions must be verified by the design engineer for each separate case.

Load capacities, system and available rod lengths, material; stainless steel									
System diameter $d_s$ [mm]	6	8	10	12	16	20	24	27	30
System load capacities									
Load capacity $F_{t,R,d}$ [kN] ⑤	9.42	17.13	27.14	39.44	73.32	114.6	165.0	215.0	262.4
Available minimum system length $L$ [mm]									
Polished	190	210	250	310	360	440	520	560	600
Available maximum system length with <u>one</u> rod [mm] ⑥									
Polished	3040	6050	6060	6070	6080	6100	6120	6140	6140
Available maximum rod length $L$ [mm]									
Polished	3000		6000						
In accordance with ETA-11/0311 the partial safety value for the table above are assumed as $\gamma_{M0} = 1.0$ and $\gamma_{M2} = 1.25$ If other partial safety factors are to be applied the load capacities have to be calculated according to ETA 11/0311.									
⑤ $N_{Rd}$ : Design load according to type test S-WUE/120315 DETAN-E in accordance with ETA 11/0311									
⑥ Longer system lengths $L$ consisting of several rods with connecting couplers are possible!									

### Fork

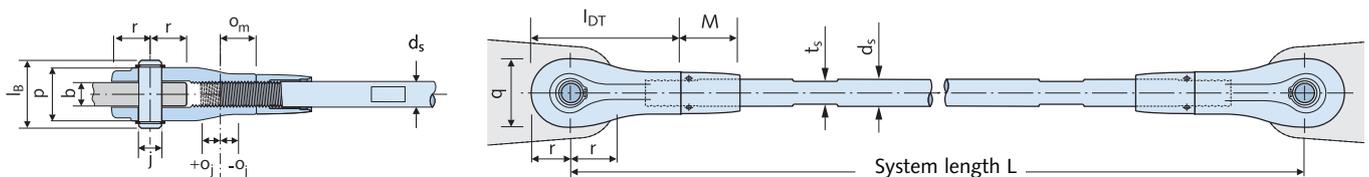


System dimensions [mm]; materials, see table above										
System diameter	$d_s$	6	8	10	12	16	20	24	27	30
Fork length	$L_{DT}$	42	50	60	73	89	110	133	147	160
Pin length	$l_B$	18	22	28	32	42	50	58	63	70
Fork width	$p$	12	16	21	24	33	40	46	51	57
Fork height	$q$	17	21	26	31	41	51	61	69	75
Thread depth	$o_m$	10.5	12.5	15.0	18.5	22.5	27.0	34.0	37.5	42.5
Screw adjustment range	$o_j$	4.5	4.5	5.0	6.5	7.5	8.0	11.0	12.5	12.5
Length locking nut	$M$	17.5	20.0	24.5	37.0	41.0	50.0	58.0	63.0	64.0
Tension rod assembly: Spanner width	$t_s$	5	6	8	10	14	18	21	24	27
Locking nut assembly: Hook spanner size		Use soft-touch pliers				25-28	30-32	34-36	40-42	45-50
Edge distance	$r$	→ see table on page 15 for dimensions of connecting plates								
Pin hole diameter	$j$									
Thickness of connection plate	$b$									

# DETAN ROD SYSTEMS

## System DETAN-E in Stainless Steel, European Technical Assessment ETA-11/0311

### Connecting plates

The load transfer from the rod system into the connection plates is considered as verified if the dimensions in the table have been observed.  
Connection plates are not included in the scope of delivery.

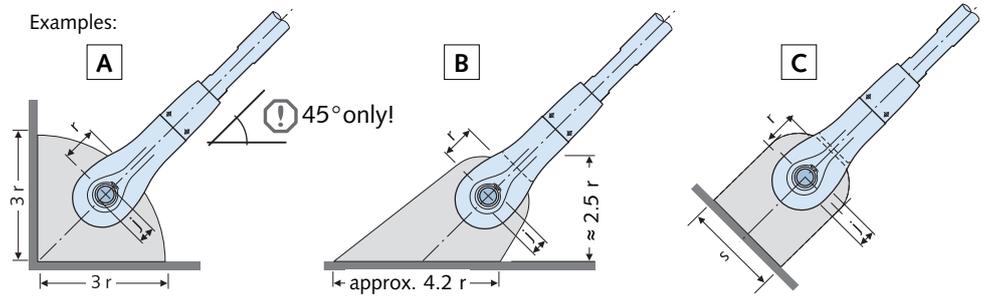



**Note:** **A** only possible when simultaneously using the circular anchor disc at 45°, see page 19.

Dimensions [mm]; material — minimum qualities: Stainless steel, strength grade S235										
System diameter	$d_s$	6	8	10	12	16	20	24	27	30
Thickness conn. plate	b	6	8	10	12	16	20	22	25	30
Hole diameter for pin	j	6.5	7.5	9.5	11.5	14.5	18.5	21.5	24.5	26.5
Hole position	r	9	12	15	18	24	29	35	39	43
Minimum width	s	17	21	26	31	41	51	61	69	75

### Cross bracing

Option 1: **Anchor disc**, Standard K40 (smallest connecting angle  $\alpha_{min} = 40^\circ$ ) Example: Anchor disc with 4 tension rods (maximum 8 tension rod connections per disc)


Option 2: **Cross coupler** (connecting angle  $\alpha = 40^\circ-90^\circ$ )

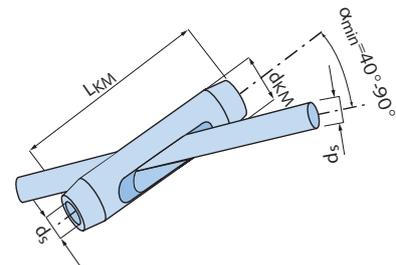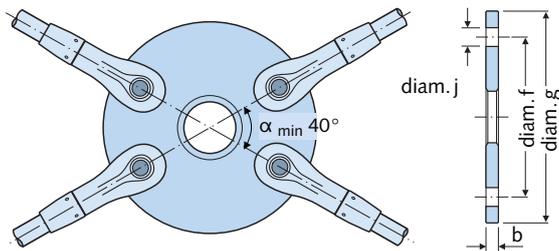

Anchor disc: measurements [mm]; material: Stainless steel, strength grade S235										
System diameter	$d_s$	6	8	10	12	16	20	24	27	30
Outer hole diameter	f	55	75	90	110	140	180	210	240	260
Outer anchor disc diameter	g	73	99	120	146	186	238	280	318	346

Cross coupler: measurements [mm]; material: Stainless steel, strength grade S355										
System diameter	$d_s$	6	8	10	12	16	20	24	27	30
Coupler length	$L_{KM}$	70	80	100	120	142	166	200	222	242
Coupler diameter	$d_{KM}$	14	17	20	24	32	39	46	52	57

### Couplers

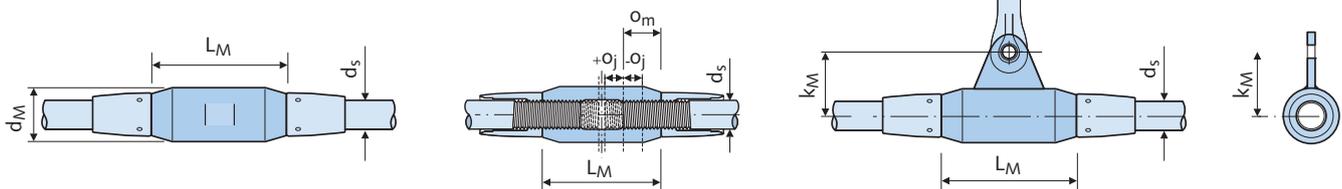


Dimensions [mm]; material, stainless steel, strength grade S355										
System diameter	$d_s$	6	8	10	12	16	20	24	27	30
Coupler length	$L_M$	34	40	40	50	62	78	94	104	120
Coupler diameter	$d_M$	12	15	20	22	28	35	42	47	53
Thread depth	$o_m$	10.5	12.5	15.0	18.5	22.5	27.0	34.0	37.5	42.5
Screw adjustment range	$o_j$	4.5	4.5	5.0	6.5	7.5	8.0	11.0	12.5	12.5
Suspension system diam.	$d_{sa}$	-	-	-	6	6	8	8	10	10
Offset, suspension hole	$k_M$	-	-	-	27.5	33.0	37.0	44.0	50.5	57.5

# DETAN ROD SYSTEMS

## Product Range Overview: DETAN Compression Rod System

### DETAN Compression rod

To complement the DETAN Tension rod system HALFEN also offers compression rods, which can be incorporated technically and aesthetically perfect into a system. Compression rods consist of larger diameter tubes, which are tapered at each end allowing standard DETAN Fork heads to be used.

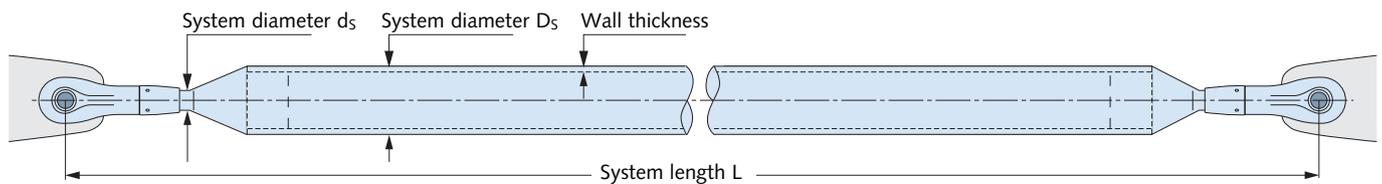

Ordering example: Compression rod system, DETAN-S,  $D_s = 42$  mm,  $L = 2000$  mm, fork connector  $d_s = 16$  mm

#### Rod cross-sections – examples / recommended configurations


System - $\varnothing D_s$ [mm]	42	54	60	76	89	114	139
Rod diameter	42.4	54.0	60.3	76.1	88.9	114.3	139.7
Wall thickness	2.6	2.6	2.9	2.9	3.2	3.6	4.0

Other rod dimensions are also available.  
Please contact HALFEN for further information.



Static calculation of compression rods is required for individual projects. A free DETAN Calculation program is available. Contact HALFEN if you require assistance. An enquiry with drawings, system dimensions and static verification is also possible.

### System components and materials

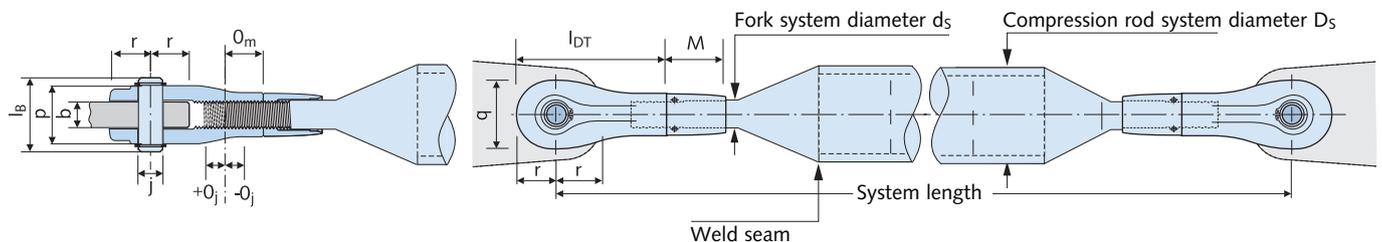

All fork and connecting plate system dimensions; see page 12–13 (steel), 14–15 (stainless steel)

#### Compression rod in steel

	Compression rod	Fork	Locking nut
System diameter $D_s$ [mm]	42-139/according to statics calculations	according to statics calculations	see fork
Material	S355J2	G20 Mn5+QT	S235JR
Finish	FV	hot-dip galvanized	hot-dip galvanized
	WB	mill finish	hot-dip galvanized

#### Compression rod in stainless steel

	Compression rod	Fork	Locking nut
System diameter $D_s$ [mm]	42-139/according to statics calculations	according to statics calculations	see fork
Material	S235	S460	S235
Finish	stainless steel ①	stainless steel ①	stainless steel ①

① Stainless steel corresponds to corrosion protection class III as in German approval no. Z-30.3-6.

**Note:** The design engineer is responsible for verifying the corrosion resistance is suitable for the various ambient conditions for each individual case when using DETAN-E.

# DETAN ROD SYSTEMS

## DETAN Compression Rod System

### System assembly

Length adjustment at the forks.  
The cone (lathe workpiece) is inserted in the rod and secured with a continuous weld.  
Available as a custom piece with at least one fork.




### Duplex-coatings

#### Custom colour design: Powder coating

Two criteria can be met with a protective powder coating:  
Free architectural design using colour with simultaneous improvement of the corrosion protection.  
Contact HALFEN for information on possible coatings.  
The coatings are applied by a certified coating specialist.

Duplex-coating (Hot-dip galvanized + paint coating or powder coating) according to EN ISO 12944-5.

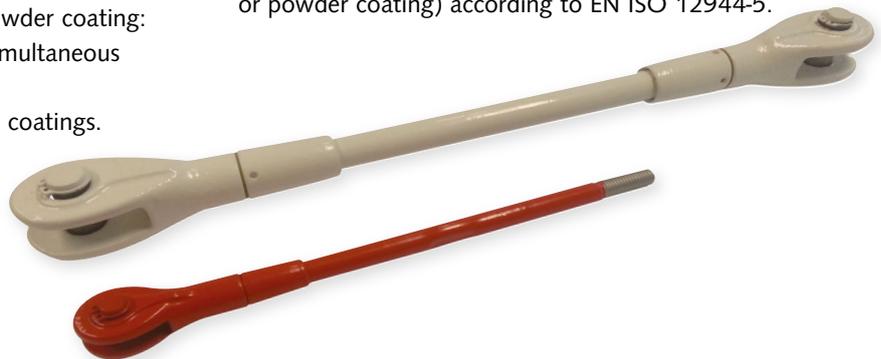


### Safety instructions and installation information

See page 19 for assembly and safety instructions. More information for DETAN Rod systems assembly can be found in the installation instruction INST\_DT.



Scan the QR to download the assembly instructions as a pdf file or go to, [www.halfen.com/products/tension-rod-systems/detan-rod-system/product-information](http://www.halfen.com/products/tension-rod-systems/detan-rod-system/product-information)

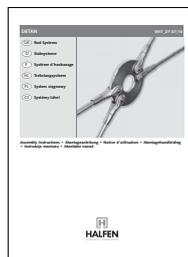

Scan the QR code for an installation video or go to, [www.halfen.com/service/videos](http://www.halfen.com/service/videos)



### Fire protection

Fire protection classification for tension rod systems:  
Individual consultation for enquiries concerning fire protection classification is available.  
Example: reactive fire protection system for steel elements with round profiles approved by the German Building Authority (DIBt).



#### HALFEN Technical Service

Contact HALFEN for further information on fire protection.



## DETAN ROD SYSTEMS

### Couplers and Compression Rods

#### DETAN Cross couplers



Cross coupler with a minimal cross angle of 40°



Cross-bracing with a cross coupler

The DETAN Cross coupler is an alternative to the anchor disc cross coupler. The new cross coupler can be used for minimum crossing angle. The cross coupler can be used instead of the anchor disc and 4 fork heads. In both cases the same load capacity is guaranteed. The new cross coupler is also available in two finishes.

- hot-dip galvanized steel
- stainless steel

The DETAN Cross couplers are elegant solutions and allow contactless crossing of tension rods in the same plane. Other advantages are the moderate costs compared to an anchor disc solution and the easy installation.

#### HALFEN DETAN Compression rods



Bracing between an exterior steel column and an interior steel beam



Compression system connected to a welded plate

The DETAN Rod system is an intelligent system combining tension and compression rods. To complement the DETAN Rod system HALFEN also supplies compression rods that integrate perfect both visually and technically into the system. To blend in and to match the tension rods the compression rods taper towards the rod-ends. This allows use of the same design of fork and locking-nuts to give a uniform design. The concept is especially convincing as the forks are suitable for compression as well as for tension loads. This combination of tension and compression rods is therefore technically very beneficial.

As with the DETAN-S and DETAN-E the compression rods are also available in steel and stainless steel. In addition to standard pipe profiles HALFEN also provides other pipe cross sections and special solutions.


The compression rod systems are pre-assembled with standard HALFEN Forks and locking-nuts.

# DETAN ROD SYSTEMS

## Connection plates and Installation

### Examples – Connection plates and anchor discs

#### Connection plates

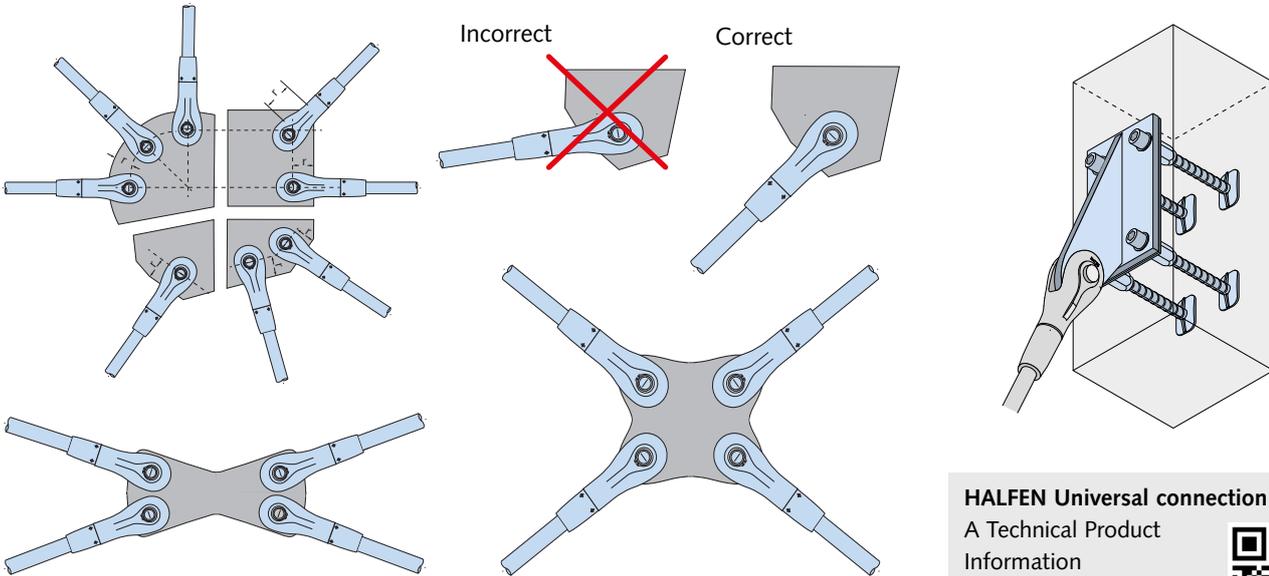

The connecting elements shown here are only examples of custom HALFEN solutions illustrating possible shapes of connecting plates discs. These steel plates are not standard products; drawings are always required for enquiries and estimates.


#### HALFEN Universal connection

A Technical Product Information pdf document can be downloaded here:




[www.halfen.com/products/reinforcement-systems/HUC Universal connection](http://www.halfen.com/products/reinforcement-systems/HUC%20Universal%20connection)

### Installation and safety notes

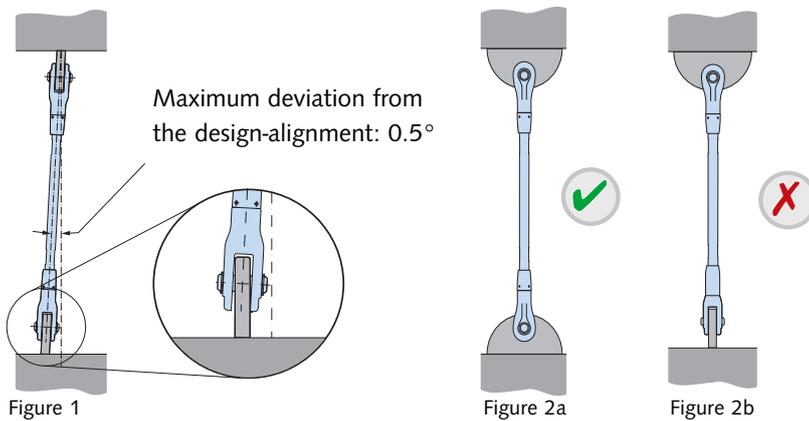

Forks must be **correctly aligned** and positioned in the **same plane** (Figure 1 and 2a) to ensure that the tension system is not subjected to bending.

To ensure the rod can be installed, one fork end of the rod **must be able to swing into place**; this may not always be possible (see figure 3b). An **anchor disk** must be used in this case, to allow correct installation (see figure 3a).

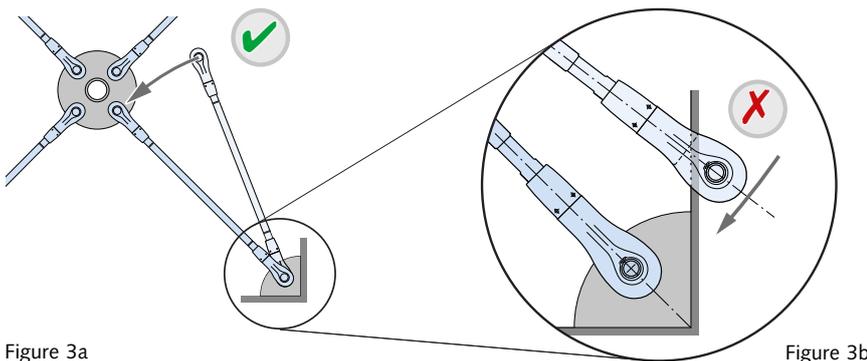

⚠ Prior to installation all DETAN Rod system components must be checked for damage. Damaged components must not be used.

⚠ More information can be found in the installation instruction **INST\_DT** (see page 17)

## DETAN ROD SYSTEMS

### The Advantages at a Glance


#### Corrosion protection

The DETAN Rod systems offer high protection against corrosion, especially for vulnerable parts of the system, e.g. the threads.


The forks and locking nuts are hot-dip galvanized to ensure durable top-quality protection against corrosion as well as to ensure good mechanical resistance.

#### Reliable and durable

- tension rods are completely hot-dip galvanized after production
- no danger of hydrogen embrittlement
- no flaking zinc
- large spanner flats ensure that rod can be properly tightened
- forks and locking nuts are hot-dip galvanized
- threads are corrosion protected
- threads are additionally protected against humidity and contamination
- sealing-sets as standard for rods with diameter 16 mm or larger

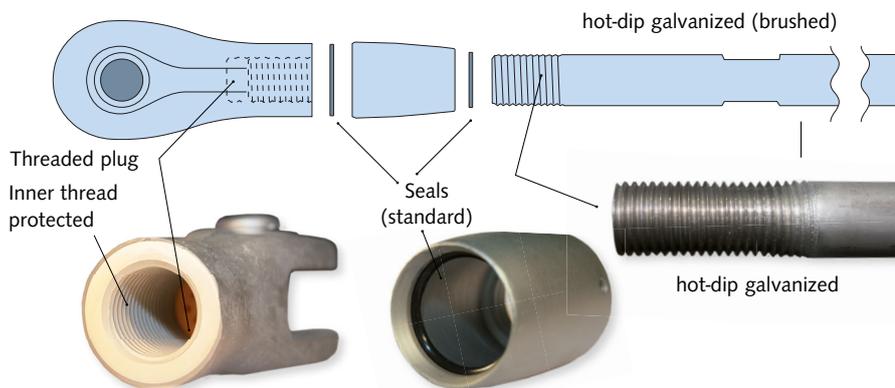

#### Sealing systems for system-component (for tension and compressure rods) = effective protection against humidity and contamination

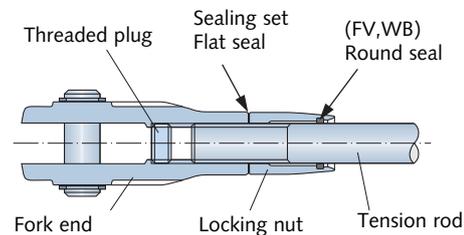

All forks are delivered with a threaded cap inserted to protect the thread as standard. The caps are colour-coded to help identify the thread direction: Yellow = right-hand thread, Blue = left-hand thread. A special sealing system is provided as standard for additional protection

for all rod diameters larger 16 mm. We recommend sealing the outer joint of the locking nuts on-site with a durable elastic silicone suitable for outdoor application. In general, all connecting couplers smaller than M16 should always be sealed using suitable silicone sealant.

#### Optimal on-site logistics



Rod marked with system information

#### Avoid mix-ups on-site with system specific rod marking

- all rods are clearly marked with contract and customer specific data (order and rod position number, rod length, system size)
- standard for systems diameter 16-60mm (DETAN-S)



Label with product-specific data

#### Easy and customer-friendly labels with specific information

- includes product-specific information, e.g. system length, system diameter
- exact identification and sorting with item position numbers
- optimized and efficient on-site logistics
- customer specified information possible: Project-data, e.g. floor numbers or node position

# DETAN ROD SYSTEMS

## The Advantages at a Glance

### Certified HALFEN quality

#### Pre-assembled delivery

The DETAN Rod systems up to and including 60 mm diameter will be delivered pre-assembled. (76 mm diameter rods and larger are delivered in separate components). Larger system elements will be separated at the couplers as required to enable delivery.

#### Economic and time saving



- no further on-site assembly required
- no danger of mix-ups
- pre-assembled to system length  $L + o_j$ , → see pages 12-14
- free movement of threads ensured
- easy online forms available for tender request, or use the order forms attached → see pages 26-27



### DETAN Design software

The DETAN design software: Structural calculation and planning tool in one programme.

- user-friendly programme interface
- Structural calculation: tension rod system design according to ETA Assessment, compression rod system design according to EC3 and ETA Assessment
- various material options and finishes
- planning and ordering of custom solutions and standards
- dimension results are used to generate item lists with individual positions listed in a print-out
- up-to-date versions of the calculation program available on the internet in German, English, French, Polish, Dutch, Czech, Italian, Spanish, Portuguese, Magyar and Slovenian

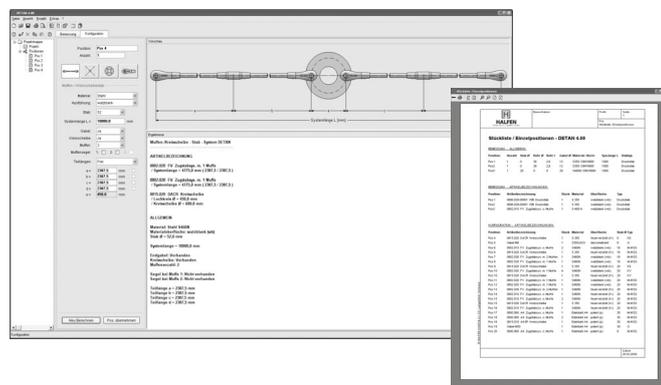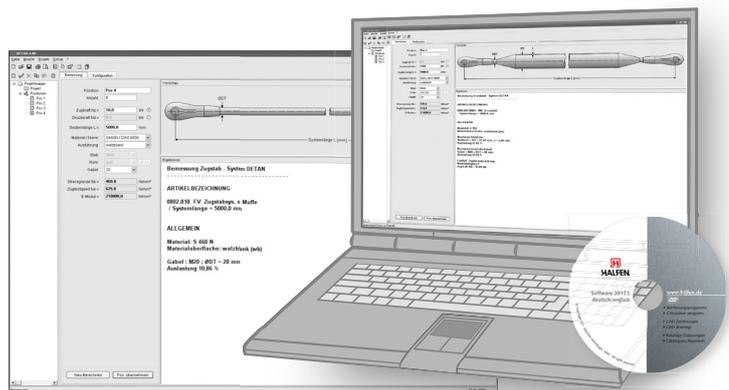


[www.halfen.com/Downloads/Software-CAD/Dimensioning Software/DETAN](http://www.halfen.com/Downloads/Software-CAD/Dimensioning Software/DETAN)

# DETAN ROD SYSTEMS

## The Advantages at a Glance

### ETA-European Technical Assessment – a reliable base for structural design

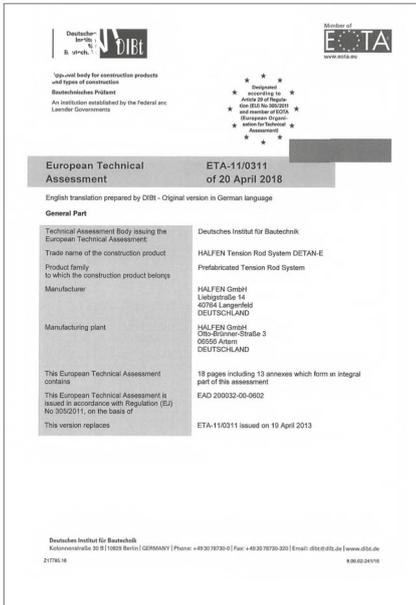

#### European Technical Assessment for DETAN-E


- tension rod system DETAN-E in stainless steel with European Technical Assessment ETA-11/0311
- permanent quality and production monitoring by a supervisory institution
- CE marking recognized in all European Union countries
- 25% higher loads compared to strength class S355 due to the higher tensile strength of the tension rods
- design of allowable loads considering country-specific coefficients  $\gamma_{M0}$  and  $\gamma_{M2}$  (NAD) using the DETAN software
- minimum requirements (strength class 235) for building-site connection plates facilitates simple procurement
- EU wide, standardised design concept
- no national approvals or certificates required
- cross couplers are a cost effective alternative to anchor discs for cross bracings

#### Design of compression rods

- compression rods are regulated in the ETA
- dimensioning of DETAN-E compression rods in stainless steel strength class 235, according to Eurocode 3 (EN1993-1-4)

#### DETAN-E

- European Technical Assessment ETA-11/0311
- CE marking

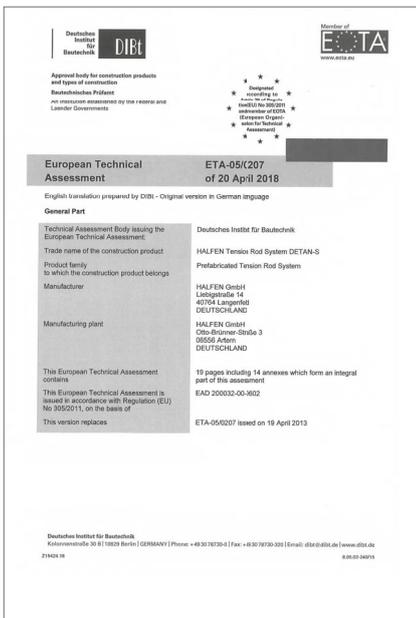

**NEW!**

#### Assessment for DETAN-S

- tension rod system DETAN-S with European Technical Assessment ETA-05/0207
- Up to 15% higher load capacities with the additional S470 and S520 strength classes which are included in the new ETA; compared with strength class S460
- CE marking recognized in all European Union countries
- design of allowable loads considering country-specific coefficients  $\gamma_{M0}$  and  $\gamma_{M2}$  (NAD) using the DETAN software
- EU wide standardised design concept
- no national approvals or certificates required
- cross couplers are a cost effective alternative to anchor discs for cross bracing

#### Design of compression rods

- compression rods are regulated in the ETA
- dimensioning of DETAN-S compression rods from tube material, strength class S355, according to Eurocode 3 (EN1993-1-1)

#### DETAN-S

- European Technical Assessment ETA-05/0207
- CE marking



DETAN approvals and type test reports available on the internet:  
[www.halfen.com/Products/Tension rod system/DETAN Rod System /Product information](http://www.halfen.com/Products/Tension rod system/DETAN Rod System/Product information)

## DETAN ROD SYSTEMS

### DETAN Pretension Unit

#### DETAN Pretension unit – Advantages and basics

The exact application of pretension for system diameters 30 and larger can be difficult, therefore additional tools such as hydraulic jacks become necessary.

The HALFEN Pretension unit for use with DETAN Rod systems from M30 to M60 provides an effective solution with load transfer using a threaded-plate preventing damages to the rod surface.

#### Additional advantages

- the system is optimised for DETAN Rods
  - extra lightweight aluminium design for simple assembly
  - targeted hydraulic application for tension up to 425 kN
  - no power-source needed
  - the high-quality galvanized surface is protected by special load transfer plates
  - simple control of load application with a calibrated manometer
- additional control using optional extensometer, even after load application (if previously gauge-marked)
  - functional, simple & robust



#### Pretension check

If the rod was previously gauge-marked, the pretension force can be controlled using an extensometer.

This system can be used during, as well as after load application.

This allows load control using hydraulic pressure as well as monitoring direct rod strain.

Similar to the DETAN Pretension unit this device is easy to use, is robust and also requires no power-source.

#### Applying pretension

If pretensioning a system is intended then this should be considered at the planning-stage. Our technical support team is available to assist in any enquires. Contact information can be found at the back of this catalogue.

To apply pretension, special pretension units are available from our technical support team. The necessary rod force is converted into the required hydraulic pressure and then applied using the DETAN Pretension unit.



# DETAN ROD SYSTEMS

## DETAN Pretension Unit

### Assembly of the pretension unit



#### Easy to attach and to operate

To avoid possible damage to the rod surface load transfer is via threaded plates. The hydraulic-system is attached in front and behind the coupler. The hydraulic jacks temporarily relieve the strain on the coupler, allowing the coupler to be easily turned by hand. When reaching the desired pressure, the hydraulic unit is released and removed. After release the coupler


takes the load.

To ensure that the maximum recommended load has been reached the required hydraulic pressure is needed. Please refer to the table below. Alternatively the load can be checked using an extensometer.

A detailed assembly instruction is available on the Internet: [www.halfen.com/Service/Brochures/Installation instructions/DETAN](http://www.halfen.com/Service/Brochures/Installation%20instructions/DETAN)

### System variations

with pretension coupler:

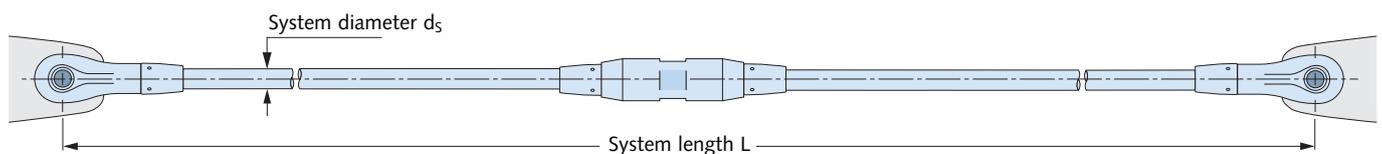


Ordering example (material steel): Tension rod system, DETAN-S,  $d_s = 30$  mm,  $L = 5600$  mm FV, 1 pretension coupler

System load capacities, system lengths and available rod lengths							
System diameter $d_s$ [mm]	30	36	42	48	52	56	60
Cross section A [mm <sup>2</sup> ]	707	1018	1385	1810	2124	2463	2827
Thread length o [mm]	105	118	126	139	176	188	195
Available min. system length with coupler L [mm]	1076	1244	1440	1652	1758	1866	2056
Load capacity $N_{R,d}$ [kN]	290.6	423.4	581.1	763.7	911.3	1052.4	1224.5

Pretension table for DETAN Rod system S (some values are rounded)								
Max. recommended pretension <sup>①</sup> [kN]	N	116	169	232	305	365	421	425 <sup>②</sup>
Hydraulic pressure [bar]	p	190	277	380	500	596	688	695
Strain [%]	$\epsilon$	0.78	0.79	0.80	0.80	0.82	0.81	0.72
Stress [N/mm <sup>2</sup> ]	$\sigma$	164	166	168	169	172	171	150
Elongation [ $\mu$ m/10 cm]	$\Delta l$	78	79	80	80	82	81	72

① Maximum recommended pretension without precise verification  $\triangleq$  40% of  $N_{R,d}$ . ② Maximum hydraulic pressure at approx. 700 bar

Pretension coupler (all dimensions in [mm])							
System diameter $d_s$	30	36	42	48	52	56	60
Coupler length $L_M$	120	140	158	180	195	210	245
Coupler diameter $d_M$	53	64	75	87	93	98	104
Locking nut length $M_V$	99	107	118	126	158	165	172
Coupler assembly $SW$	46	55	65	75	80	85	90
Tension rod assembly	Spanner width $t_s$						
	27	32	36	41	46	50	55
Locking nut assembly	Hook spanner size						
	45-50	52-55	68-75	68-75	80-90	80-90	80-90

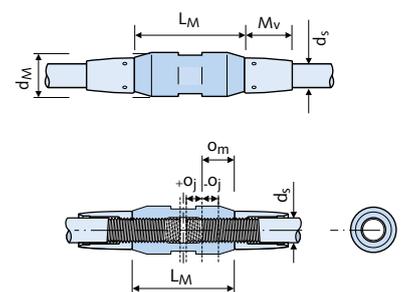


## DETAN ROD SYSTEMS

### Planning Help

#### Tender specification – examples

##### HALFEN Tension rod system DETAN-E

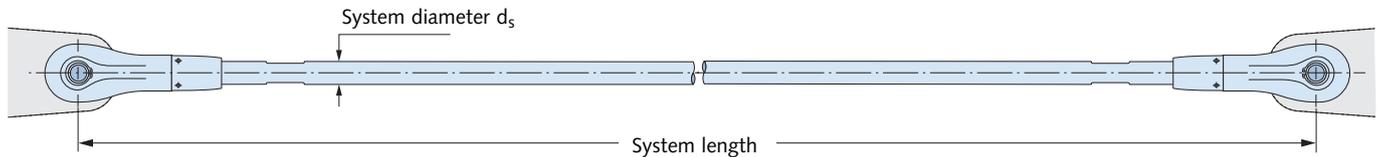

HALFEN Tension rod system type DETAN-E made of stainless steel, corrosion resistance class (CRC) III according to EN 1993-1-4: 2006, consisting of 1 right-hand threaded fork, 1 left-hand thread fork, plus 1 tension rod including 2 pins, 4 circlips and 2 DT-E nuts,

with European Technical Assessment ETA 11/0311, pre-assembled and product-specific-labelled tension rod system, type DETAN-E,  $d_s$ , L


with

$d_s$  = system-diameter [mm] ..... (6 / 8 / 10 / 12 / 16 / 20 / 24 / 27 / 30)

L = system-length [mm] (from bolt-axis/to bolt-axis),

or equivalent; deliver and install according to the manufacturer's installation instructions. Includes welding the connector plates according to the specifications provided by the planner.

##### HALFEN Tension rod system DETAN-S ...

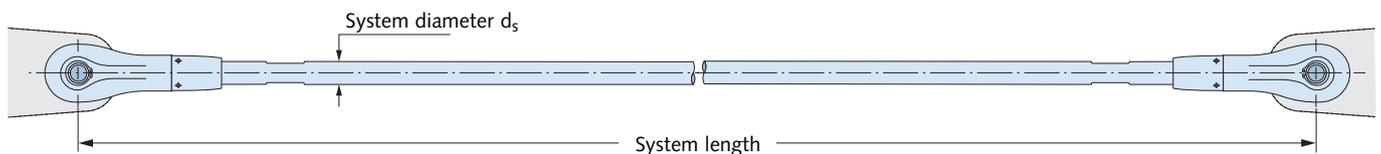

HALFEN Tension rod system type DETAN-S, consisting of 1 right-hand threaded fork, 1 left-hand threaded fork, plus 1 tension rod including 2 pins, 4 circlips and 2 DT-S nuts,

with European Technical Assessment ETA 05/0207, pre-assembled and product-specific-labelled tension rod system, type DETAN-S  $d_s = 30$ , L, F

with

$d_s$  = system-diameter [mm] ..... (10 / 12 / 16 / 20 / 24 / 27 / 30 / 36 / 42 / 48 / 52 / 56 / 60 / 76 / 85 / 95)

L = system-length [mm] (from bolt-axis/to bolt-axis),

F = ..... (material FV /WB) for hot-dip galvanized or mill finished surface

completely hot-dip galvanized finish (alternative; mill finished tension rod), or equivalent; deliver and install according to the manufacturer's installation instructions. Includes welding the connector plates according to the specifications provided by the planner.





## CONTACT HALFEN WORLDWIDE

HALFEN is represented by subsidiaries in the following countries, please contact us!

Austria	HALFEN Gesellschaft m.b.H. Leonard-Bernstein-Str. 10 1220 Wien	Phone: +43-1-259 6770 E-Mail: office@halfen.at Internet: www.halfen.at	
Belgium / Luxembourg	HALFEN N.V. Borkelstraat 131 2900 Schoten	Phone: +32-3-658 07 20 E-Mail: info@halfen.be Internet: www.halfen.be	Fax: +32-3-658 1533
China	HALFEN Construction Accessories Distribution Co.Ltd. Room 601 Tower D, Vantone Centre No. A6 Chao Yang Men Wai Street Chaoyang District Beijing · P.R. China 100020	Phone: +86-10 5907 3200 E-Mail: info@halfen.cn Internet: www.halfen.cn	Fax: +86-10 5907 3218
Czech Republic	HALFEN s.r.o. Business Center Šafránkova Šafránkova 1238/1 155 00 Praha 5	Phone: +420 - 311-690 060 E-Mail: info@halfen.cz Internet: www.halfen.cz	Fax: +420-235-314 308
France	HALFEN S.A.S. 18, rue Goubet 75019 Paris	Phone: +33-1-445231 00 E-Mail: halfen@halfen.fr Internet: www.halfen.fr	Fax: +33-1-445231 52
Germany	HALFEN Vertriebsgesellschaft mbH Liebigstr. 14 40764 Langenfeld	Phone: +49-2173-970-0 E-Mail: info@halfen.de Internet: www.halfen.de	Fax: +49-2173-970 225
Italy	HALFEN S.r.l. Soc. Unipersonale Via F.lli Bronzetti N° 28 24124 Bergamo	Phone: +39-035-0760711 E-Mail: tecnico@halfen.it Internet: www.halfen.it	Fax: +39-035-0760799
Netherlands	HALFEN b.v. Oostermaat 3 7623 CS Borne	Phone: +31-74-267 14 49 E-Mail: info@halfen.nl Internet: www.halfen.nl	Fax: +31-74-267 2659
Norway	HALFEN AS Postboks 2080 4095 Stavanger	Phone: +47-51 82 34 00 E-Mail: post@halfen.no Internet: www.halfen.no	
Poland	HALFEN Sp. z o.o. Ul. Obornicka 287 60-691 Poznan	Phone: +48-61-622 14 14 E-Mail: info@halfen.pl Internet: www.halfen.pl	Fax: +48-61-622 14 15
Spain	HALFEN IBERICA, S.L. Polígono Industrial Santa Ana c/ Ignacio Zuloaga 20 28522 Rivas-Vaciamadrid	Phone: +34 91 632 18 40 E-Mail: info@halfen.es Internet: www.halfen.es	Fax: +34-91 633 42 57
Sweden	Halfen AB Vädursgatan 5 412 50 Göteborg	Phone: +46-31-98 58 00 E-Mail: info@halfen.se Internet: www.halfen.se	Fax: +46-31-98 58 01
Switzerland	HALFEN Swiss AG Hertistrasse 25 8304 Wallisellen	Phone: +41-44-849 78 78 E-Mail: info@halfen.ch Internet: www.halfen.ch	Fax: +41-44-849 78 79
United Kingdom / Ireland	HALFEN Ltd. A1/A2 Portland Close Houghton Regis LU5 5AW	Phone: +44 -1582- 47 03 00 E-Mail: info@halfen.co.uk Internet: www.halfen.co.uk	Fax: +44- 1582-47 03 04
United States of America	HALFEN USA Inc. PO Box 18687 San Antonio TX 78218	Phone: +1 800.423.91 40 E-Mail: info@halfenusa.com Internet: www.halfenusa.com	Fax: +1 877.683.4910
<b>For countries not listed</b> HALFEN International	HALFEN International GmbH Liebigstr. 14 40764 Langenfeld / Germany	Phone: +49 -2173-970-0 E-Mail: info@halfen.com Internet: www.halfen.com	Fax: +49-2173-970-849

HALFEN is represented with sales offices and distributors worldwide. Please contact us: [www.halfen.com](http://www.halfen.com)

### NOTES REGARDING THIS CATALOGUE

**Technical and design changes reserved.** The information in this publication is based on state-of-the-art technology at the time of publication. We reserve the right to make technical and design changes at any time. HALFEN GmbH shall not accept liability for the accuracy of the information in this publication or for any printing errors.

The HALFEN GmbH subsidiaries in Germany, France, the Netherlands, Austria, Poland, Switzerland and the Czech Republic are Quality Management certified according to **ISO 9001:2015**, Certificate no. 202384-2016-AQ-GER-DAKkS.

